

SPEC No.	E L 0 8 2 0 4 9 B
I S S U E: MAR 14 1997	

To : \_\_\_\_\_

REQUEST FOR
CONFIRMATION

## S P E C I F I C A T I O N S

Product Type THE INTERFACE IC FOR TFT LCD PANELModel No. I R 3 Y 2 6 A

※This specifications contains 31 pages including the cover and appendix.  
If you have any objections, please contact us before issuing purchasing order.

### CUSTOMERS ACCEPTANCE

DATE: \_\_\_\_\_

BY: \_\_\_\_\_

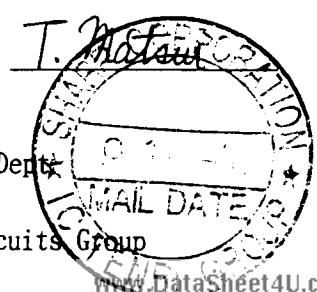
PRESENTED

BY: T. Ohno  
T. OHNO  
Dept. General Manager

REVIEWED BY:

T. Fujita

PREPARED BY:



Devices Engineering Dept.  
Tenri Division  
Tenri Integrated Circuits Group  
SHARP CORPORATION

●Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.

●When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.

(1) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (2), even for the following application areas, be sure to observe the precautions given in Paragraph (2). Never use the products for the equipment listed in Paragraph (3).

- Office electronics
- Instrumentation and measuring equipment
- Machine tools
- Audiovisual equipment
- Home appliances
- Communication equipment other than for trunk lines

(2) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.

- Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
- Mainframe computers
- Traffic control systems
- Gas leak detectors and automatic cutoff devices
- Rescue and security equipment
- Other safety devices and safety equipment, etc.

(3) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communications equipment for trunk lines
- Control equipment for the nuclear power industry
- Medical equipment related to life support, etc.

(4) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.

●Please direct all queries regarding the products covered herein to a sales representative of the company.

## C O N T E N T S

www.DataSheet4U.com

	Page
1. Description	2
2. Terminal Name	3
3. Terminal Connections (TOP VIEW)	4
4. Block Diagram	5
5. Description of terminals	6
6. Functional operation	10
7. Precautions	12
8. Absolute Maximum Ratings	13
9. Electrical Characteristics	14
10. Application Circuit Example	25
11. Package and Packing Specification	26

**1. Description**

The Sharp IR3Y26A is a multi-functional IC for a TFT LCD panel adopting the source drivers operating at 5V.

This IC contains polarity inverting circuits, common voltage generating circuit, and gamma correction circuits to meet the specific requirements of the LCD panels, and contains double channels of RGB inputs.

**Applications:**

LCD color television sets, LCD color displays, LCD color monitors etc..

**Features:**

- (1) Low power dissipation. (140mW TYP.)
- (2) Built-in double channels of RGB inputs.
- (3) Built-in gamma correction circuits.
- (4) Built-in polarity inverting circuits.
- (5) Built-in common voltage generating circuit.
- (6) Frequency characteristic 6.5MHz(TYP.)

\* Not designed or rated as radiation hardened.

\* Package material: Plastic

\* Chip material and wafer substrate type: P type silicon

\* Number of pins and package type: 48-pin quad-flat package

\* Process (Structure): Bipolar

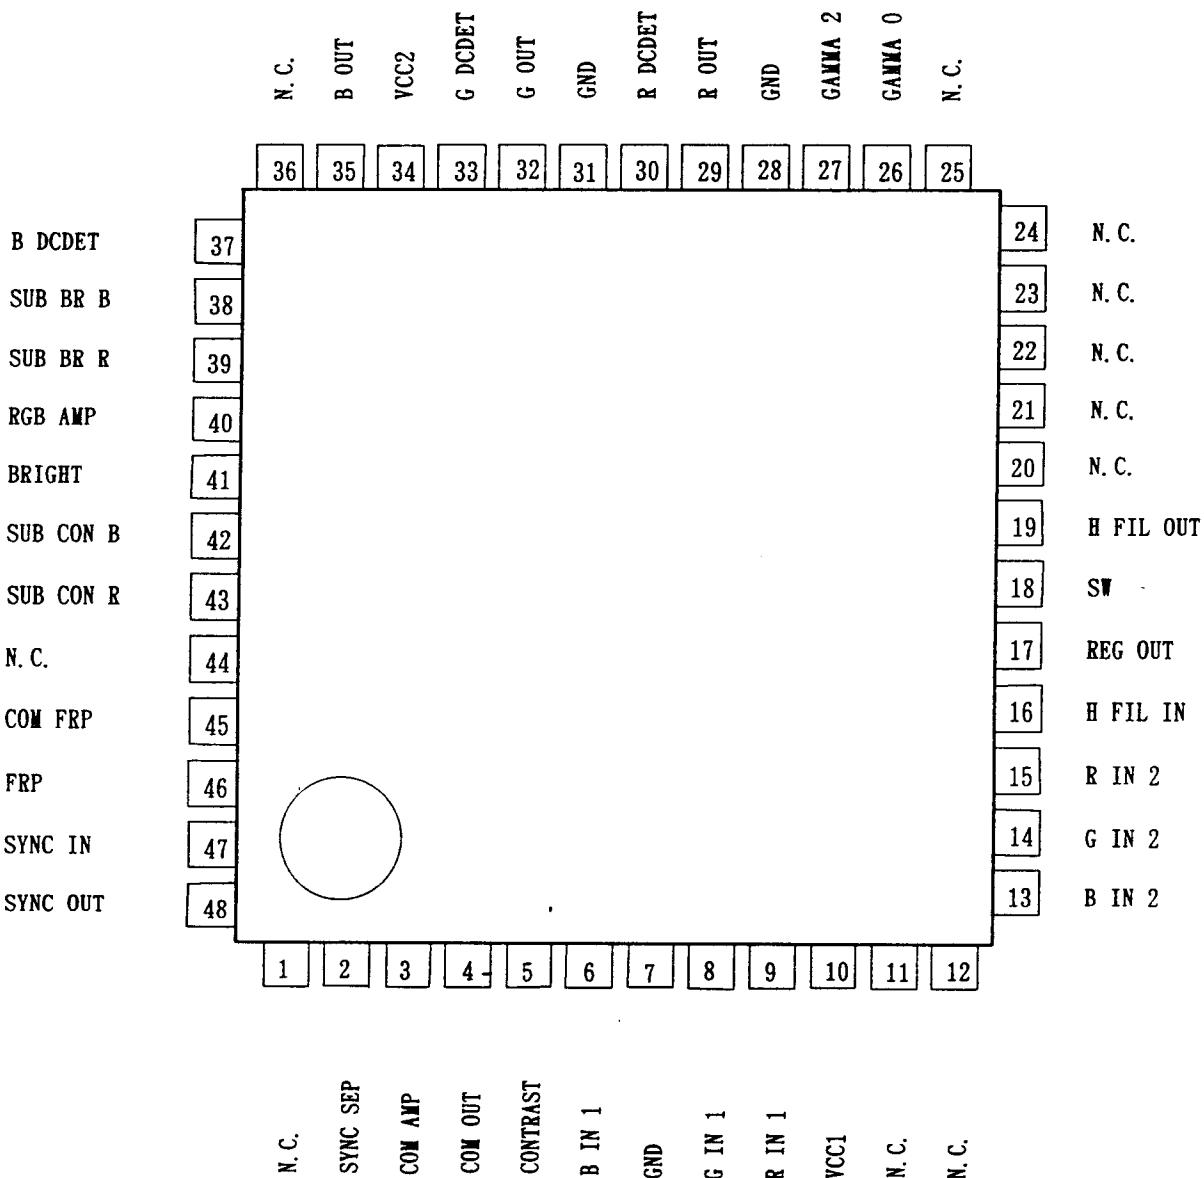
## 2. Terminal Name

www.DataSheet4U.com


Pin No.	Terminal Name	Pin No.	Terminal Name
1	N. C.	2 5	N. C.
2	SYNC SEP	2 6	GAMMA 0
3	COM AMP	2 7	GAMMA 2
4	COM OUT	2 8	GND
5	CONTRAST	2 9	R OUT
6	B IN 1	3 0	R DCDET
7	GND	3 1	GND
8	G IN 1	3 2	G OUT
9	R IN 1	3 3	G DCDET
1 0	VCC1	3 4	VCC2
1 1	N. C.	3 5	B OUT
1 2	N. C.	3 6	N. C.
1 3	B IN 2	3 7	B DCDET
1 4	G IN 2	3 8	SUB BRIGHT B
1 5	R IN 2	3 9	SUB BRIGHT R
1 6	H FIL IN	4 0	RGB AMP
1 7	REG OUT	4 1	BRIGHT
1 8	SW	4 2	SUB CONTRAST B
1 9	H FIL OUT	4 3	SUB CONTRAST R
2 0	N. C.	4 4	N. C.
2 1	N. C.	4 5	COM FRP
2 2	N. C.	4 6	FRP
2 3	N. C.	4 7	SYNC IN
2 4	N. C.	4 8	SYNC OUT

## 3. Terminal Connections (TOP VIEW)

www.DataSheet4U.com













## 4. Block Diagram





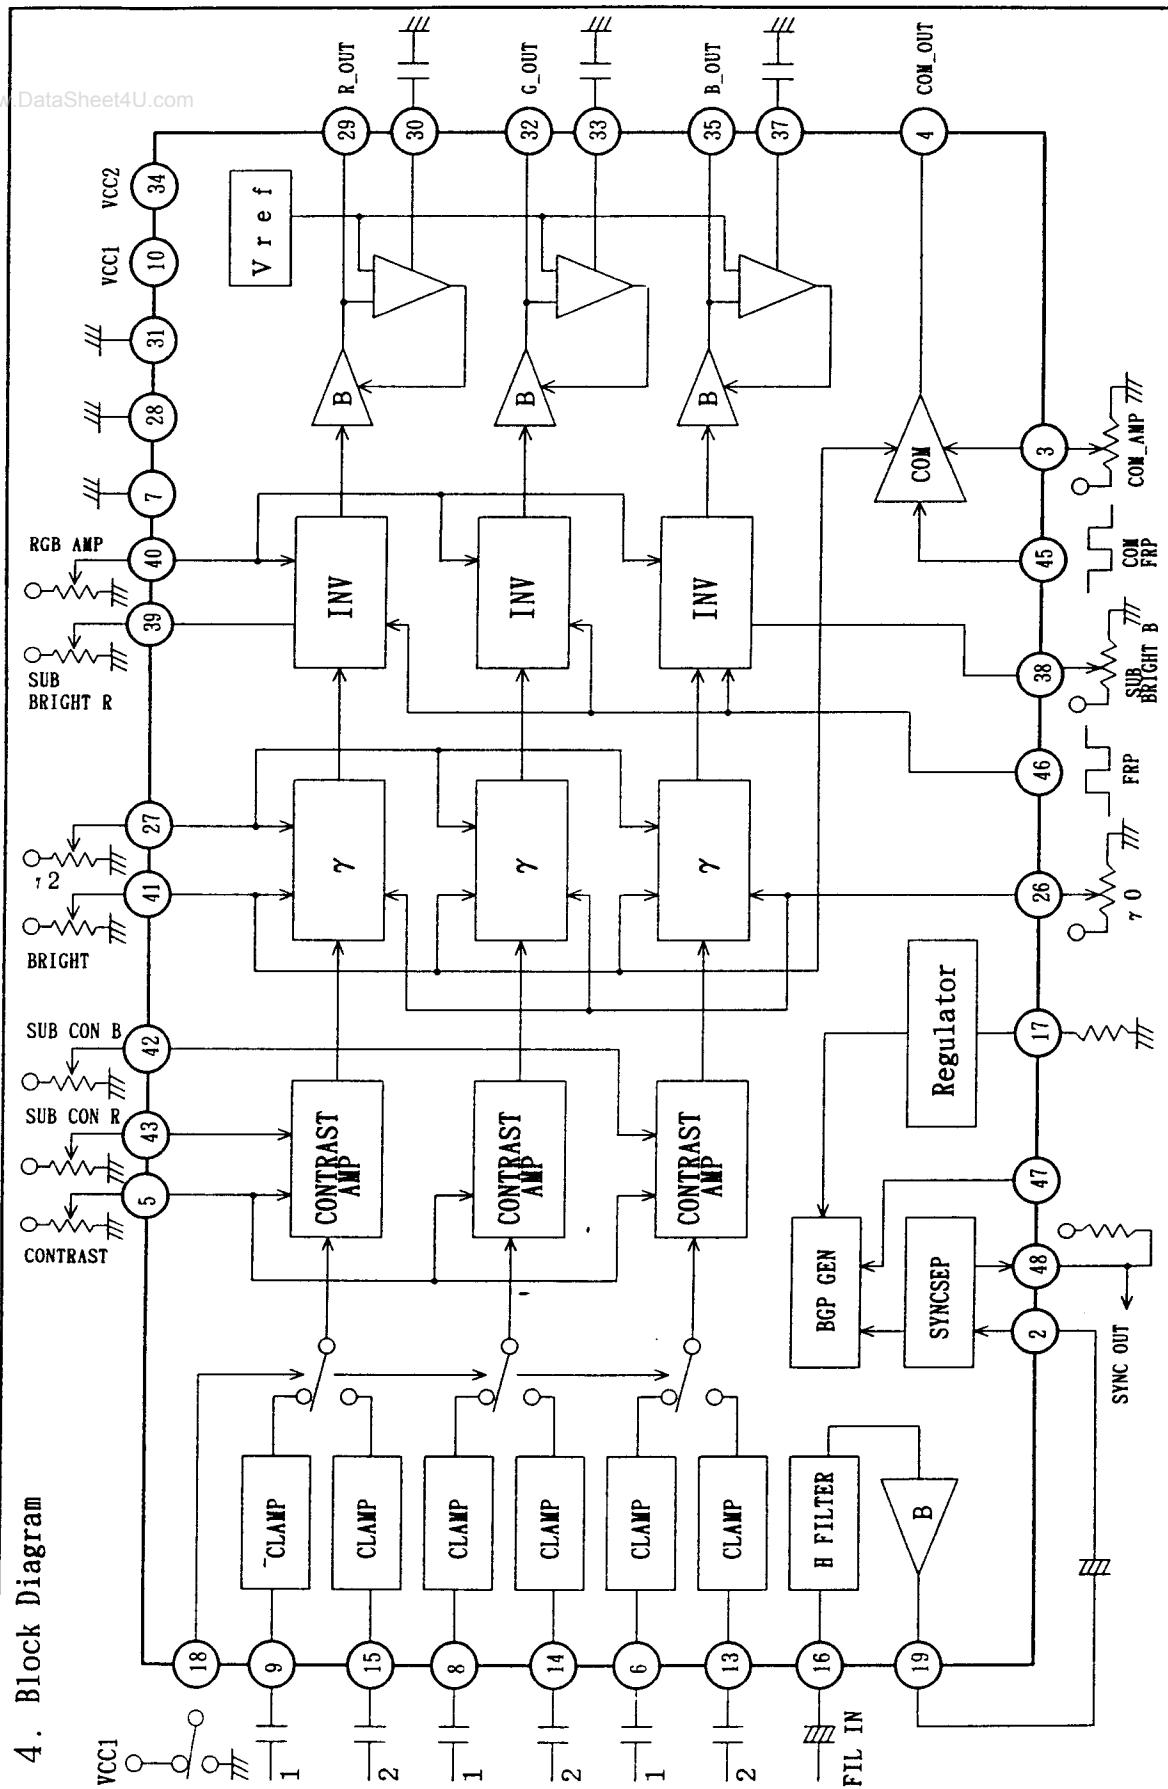








5. Description of Terminals ( $V_{CC1}=5.0V$  These voltage are typical value.)

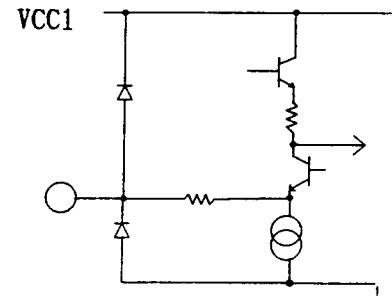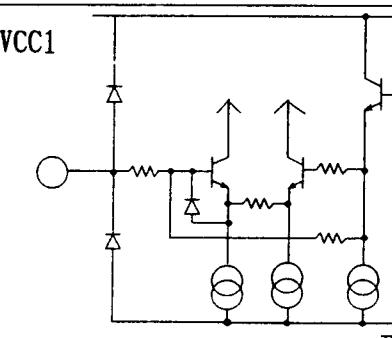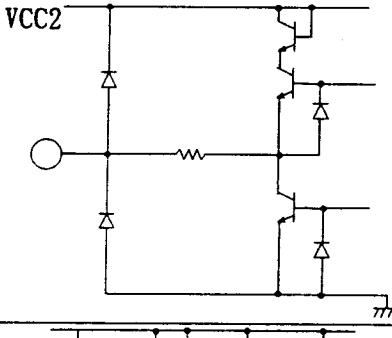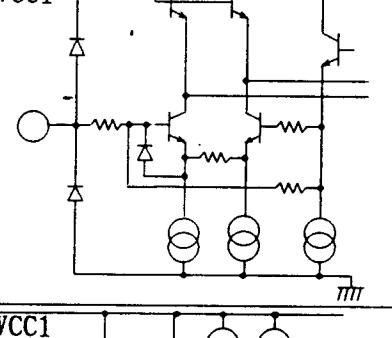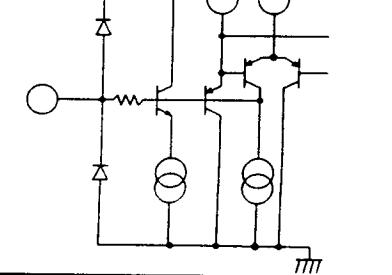www.DataSheet4U.com

Pin No.	Term. Name	voltage	Equivalent circuit	Description
2	SYNC SEP	2.0V		The input terminal of the video signal or H FIL OUT signal for the SYNC-separation circuit.
3	COM AMP	2.1V		The DC voltage applied to this terminal adjusts the amplitude of the COM output. This terminal is preset inside the IC.
4	COM OUT			The output terminal of the COM signal.
5	CONTRAST	2.1V		The DC voltage applied to this terminal adjusts the contrast of the RGB output signals. This terminal is preset inside the IC.
6 8 9 13 14 15	B IN 1 G IN 1 R IN 1 B IN 2 G IN 2 R IN 2	1.9V		The input terminal of the analog RGB signals. These signals are required to be AC coupled.

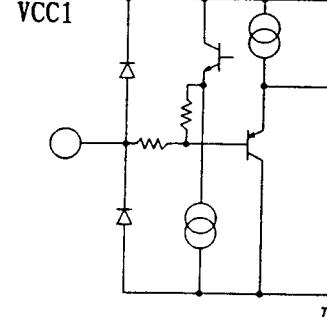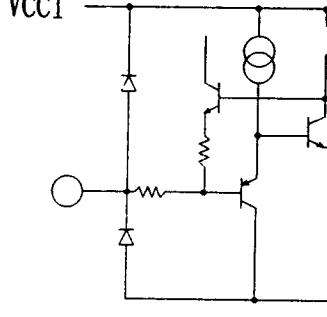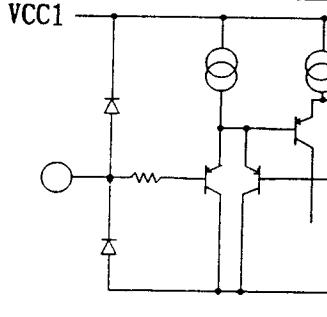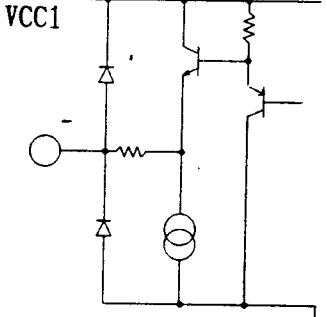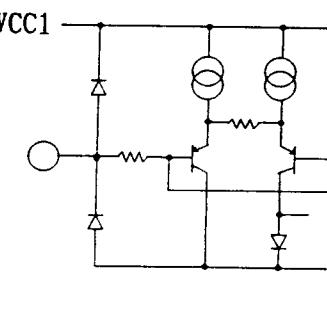Pin No.	Term. Name	voltage	Equivalent circuit	Description
7, 28 31	GND			These terminals are ground.
10	VCC1			Connect to the power supply
16	H FIL IN	2.0		The input terminal of the video signal for SYNC separation circuit. The impedance of this terminal is about a 12kΩ.
17	REG OUT	1.2V		The value of the resistor connected between this terminal and GND adjusts the width of the gate pulse.
18	SW			The input terminal for the source selection signal. Give the "Low" level in case of the RGB IN 2 inputs, and give the "High" level or open in case of the RGB IN 1 inputs.
19	H FIL OUT	4.0V		The output terminal of the video signal for SYNC-separation circuit.
26	GAMMA 0			The DC voltage applied to this terminal adjusts γ0 point. This terminal is pre-set inside the IC.

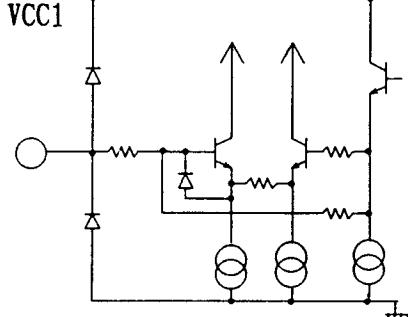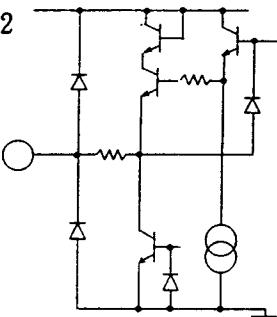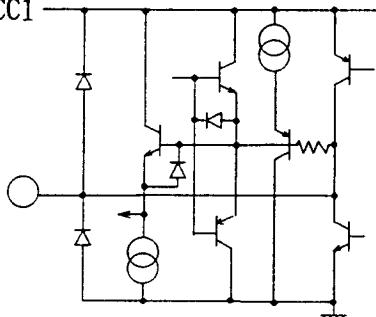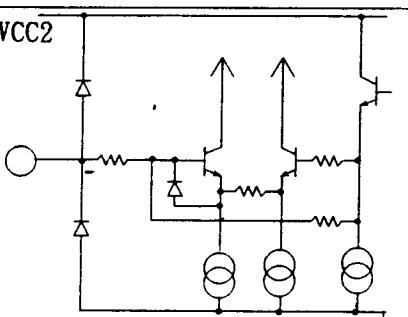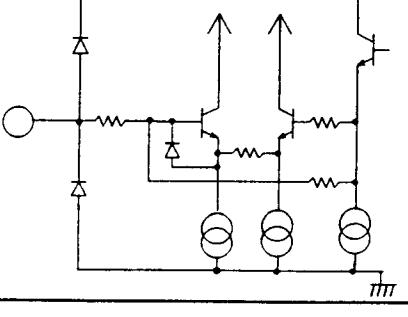pin No.	Term. Name	voltage	Equivalent circuit	Description
27	GAMMA 2	2.1V		The DC voltage applied to this terminal adjusts the gamma point. This terminal is pre-set inside the IC.
29 32 35	R OUT G OUT B OUT	VCC1/2		The output terminals of the RGB signals. The output circuits keep the DC voltage Vcc1/2.
30 33 37	R DCDET G DCDET B DCDET			These terminals are connected to the capacitors that smooth and hold the DC voltage of the RGB output signals. Because of the high impedance, use low leakage current capacitor.
34	VCC2			Connect to the power supply for the RGB outputs.
38 39	SUB BRIGHT B SUB BRIGHT R	2.1V		The DC voltage applied to these terminals adjust the brightness of the R and B signals finely by moving the gamma correction curve. These terminals are pre-set inside the IC.
40	RGB AMP	2.1V		The DC voltage applied to this terminal adjusts the amplitude (BLK-BLK) of the RGB output signals. This terminal is pre-set inside the IC.

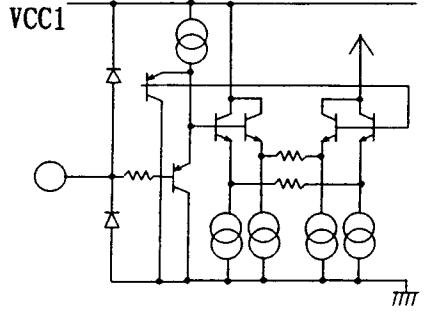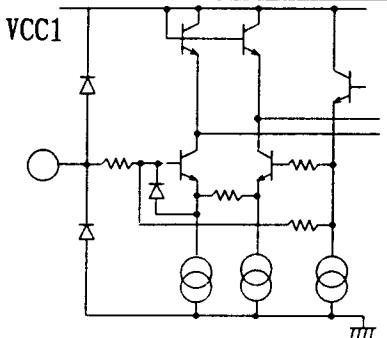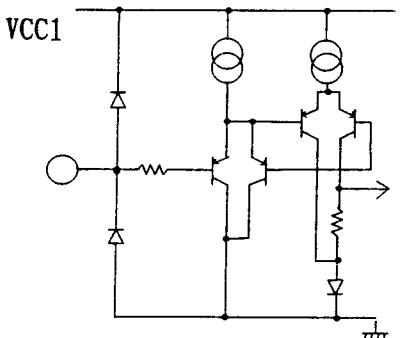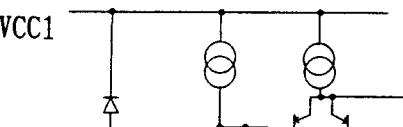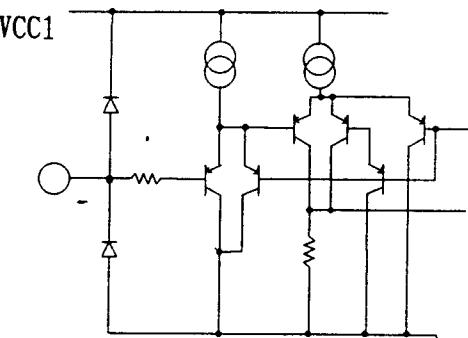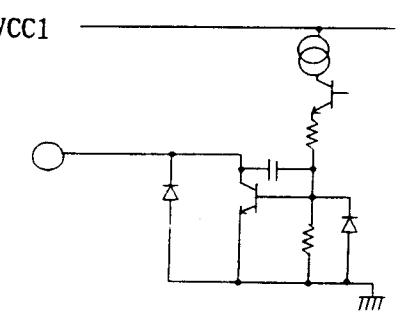Pin No.	Term. Name	Voltage	Equivalent circuit	Description
4 1	BRIGHT			The DC voltage applied to this terminal adjusts the position of the gamma correction curve and the amplitude of the common output voltage.
4 2 4 3	SUB CON B SUB CON R	2.1V 2.1V		The DC voltage applied to these terminals finely adjust the contrast of the R and B signals. These terminals are pre-set inside the IC.
4 5	COM FRP			The input terminal for the switching signal of the COM output.
4 6	FRP			The input terminal for the inverting signal of the RGB outputs.
4 7	SYNC IN			The input terminal for the horizontal synchronizing pulse. (Active Low)
4 8	SYNC OUT	0.2V		The output terminal for the synchronizing pulse separated by the SYNC separation circuit. The output is provided by an open collector circuit.

## 6. Functional operation

[www.DataSheet4U.com](http://www.DataSheet4U.com)

### • RGB Inputs

The RGB inputs accept the analog signals. When giving the "High" level to the SW input or opening it, the R IN 1, G IN 1 and B IN 1 are valid, and when giving the "Low" level to it, the R IN 2, G IN 2 and B IN 2 are valid.

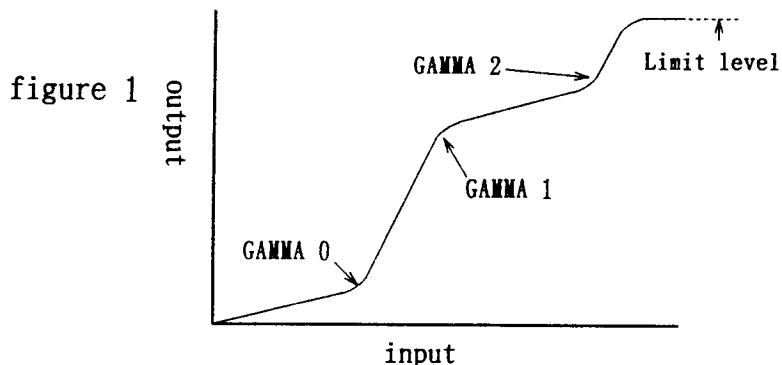
### • H FILTER

This consists of LPF and buffer for SYNC-separation circuit. The input impedance of the H FIL IN terminal is about a 12kΩ.

### • Gamma correction

The output signals are corrected according to the characteristic of the LCD panel as shown in figure 1.

The pin 27 and 26 adjust the each relative position of the inflection 10, 12. The pin 32(bright) is able to adjust these positions at the same time.



### • RGB outputs

The RGB outputs (pin 29, pin 32, pin 35) are inverted by the FRP signal applied to the pin 46 as shown in Figure 2.

The output circuits keep the DC voltage Vcc1/2.

The dynamic range is adjusted by the RGB AMPLITUDE terminal(pin 40).

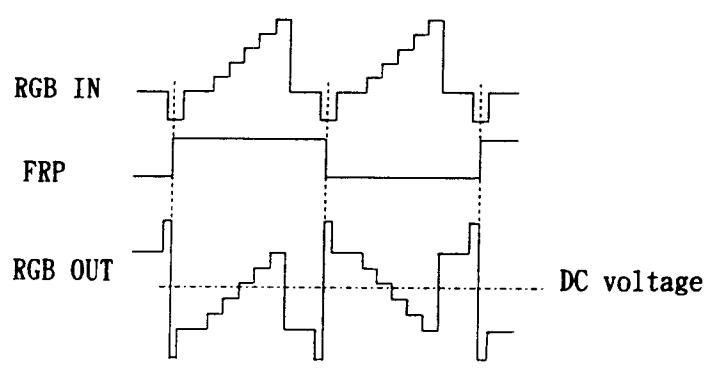


figure 2

- Bright control

The gamma correction points of the RGB output and the amplitude of the COM output change according to the voltage applied to the BRIGHT terminal. (Fig. 3) This circuit assumes that the COM output is amplified threefold outside. The relation between the output amplitude and the gamma collection point is able to be adjusted according to the voltage applies to the COMMON AMPLITUDE ADJUST terminal.

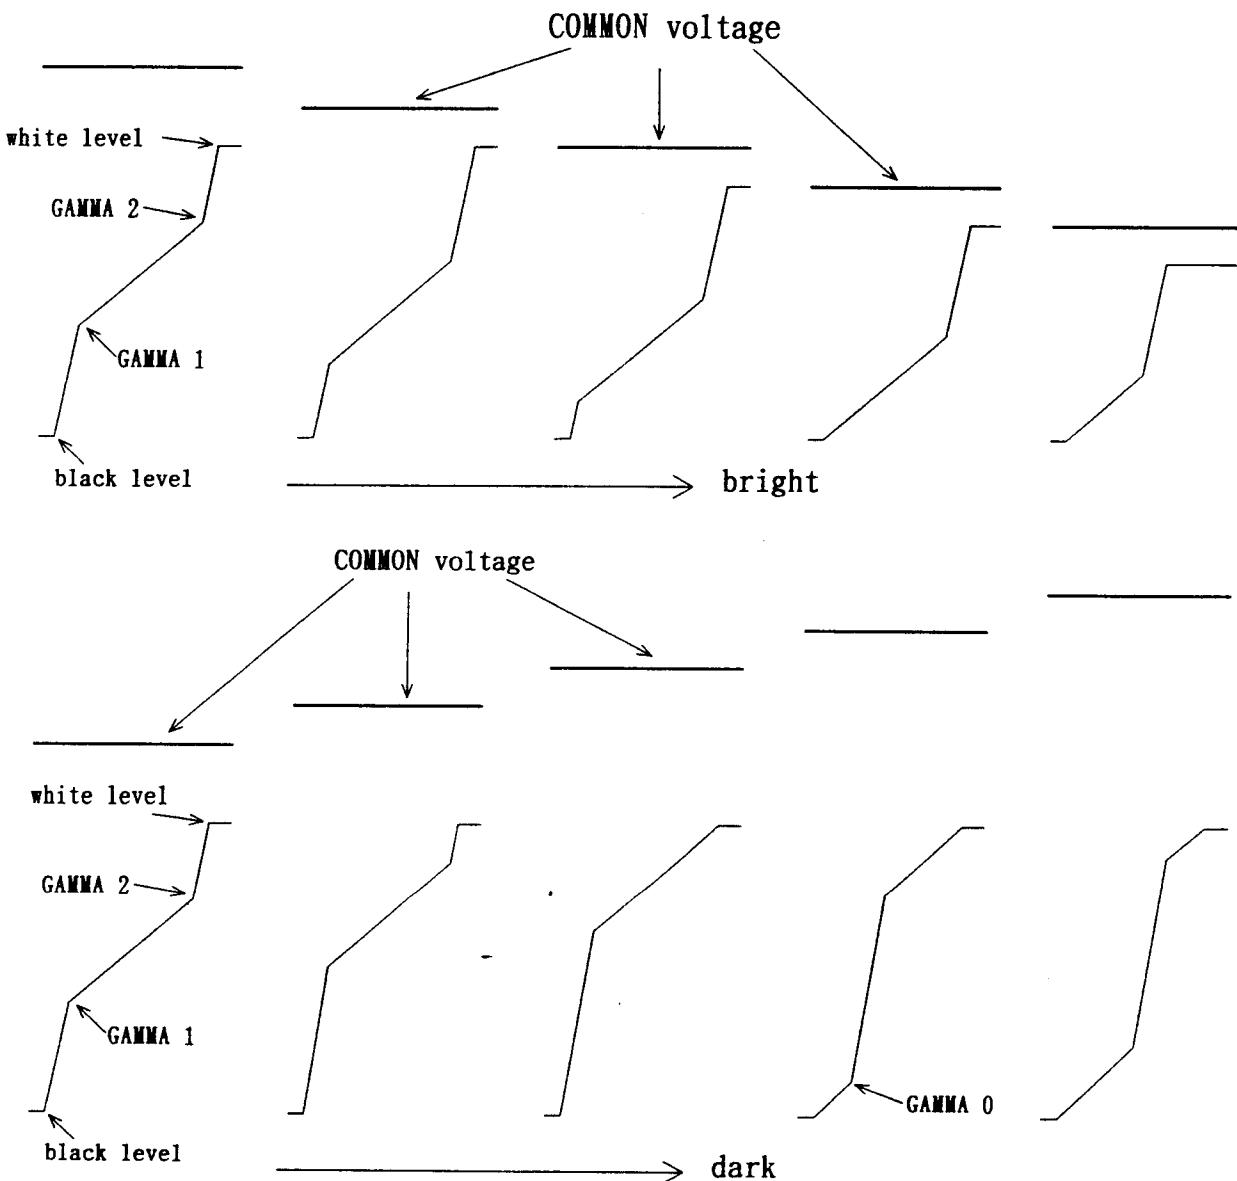


figure 3

## 7. Precautions

### \* Power supply pin

Ensure that pin 17 and pin 18 are at the lowest potential, and do not open them.

Make sure that the voltage applied to the power supply pin must be as follows:  $GND2 = GND1 \leq Vcc1 \leq Vcc2$

### \* White-balance adjustment

The SUB BRIGHT B and R terminals(pin 30 and pin 31) are preset inside the IC.

When these preset terminals are open, the white-balance could be lost by the deviation of the electronic components in the system. Therefore in someway, regulating the white-balance, is recommended.

### \* RGB outputs amplitude(between the black level and the following inverted black level)

Make the maximum amplitude of the RGB outputs below  $Vcc1 - 0.4V_{P-P}$ . (including the case that adjusted by the SUB BRIGHT and the RGB AMPLITUDE ADJUST terminals)

### \* RGB outputs terminal and COMMON output terminal

In case of connecting low impedance loads, because the consumption current of the  $Vcc2$  terminal increase, pay attention to the maximum power dissipation of the package.

### \* Input of the signal

Synchronize all the input signals connected to the IC.

### \* Bright control limit

In case of varing the BRIGHT control voltage or GAMMA 0 control voltage, make the gamma 0 position be below 1V above the pedestal level.

### \* Common Amplitude Adjust

It is recommended not to supply COMMON AMPLITUDE ADJUST with a constant voltage but to adjust it one by one. The output amplitude of COMMON OUT has a variability of  $1.55 \pm 0.3V_{P-P}$  when COMMON AMPLITUDE ADJUST is supplied with a voltage of 2.05V and BRIGHT is supplied with a voltage of 1.0V.

It is afraid that the variability of luminance on the LCD display should increase at a constant COMMON AMPLITUDE ADJUST voltage, because both the output amplitude and the variability of COMMON OUT are amplitude, and a LCD module is supplied with them.

### \* Output dynamic range

Adjust RGB AMP(pin 40) to make the output dynamic range more than  $3V_{P-P}$ .

## 8. Absolute Maximum Ratings (Ta=25°C)

www.DataSheet4U.com

Parameter	Symbol	Conditions	Rating	Units
Supply voltage	V <sub>cc1</sub> - GND		7	V
	V <sub>cc2</sub> - GND		10	V
Power dissipation	P <sub>D</sub>	T <sub>a</sub> ≤ 25°C	580	mW
Derating ratio		T <sub>a</sub> > 25°C	4.64	mW/°C
Operating temperature range	T <sub>opr</sub>		-30 ~ 85	°C
Storage temperature range	T <sub>stg</sub>		-55 ~ 150	°C
Each adjust pins voltage	V <sub>IN</sub>		GND ~V <sub>cc1</sub>	V
SYNC OUT output strength voltage	V <sub>SD</sub>		10	V
RGB input signals voltage			V <sub>cc1</sub> *1	V
FRP input signal voltage			GND ~V <sub>cc1</sub>	V
SYNC IN input signal voltage			GND ~V <sub>cc1</sub>	V

\*1) Means the potentials of pin 6, 8, 9, 13, 14 and 15 are in this range.

## Operating supply voltage range

Parameter	Symbol	Conditions	Rating	Units
Operating supply voltage range	V <sub>cc1</sub> -GND		4.5~5.5	V
	V <sub>cc2</sub> -GND		7.0~8.0	V
	V <sub>cc2</sub> -V <sub>cc1</sub>		≥ 2.0	V

## Recommended operating conditions

Parameter	Symbol	Conditions	Rating			Units
			MIN	TYP	MAX	
RGB analog input signals voltage	v <sub>RGBIN</sub>	-	0	0.714	0.8	V <sub>p-p</sub> *2
H FIL IN input signals voltage	v <sub>HFIN</sub>	-		1.0		V <sub>p-p</sub>
FRP input "HI" level voltage			2.0			V
FRP input "LOW" level voltage					0.8	V
COW FRP input "HI" level voltage			2.0			V
COW FRP input "LOW" level voltage					0.8	V
SYNC IN input "HI" level voltage			2.0			V
SYNC IN input "LOW" level voltage					0.8	V

\*2 Between the pedestal level and the white level.

## 9. Electrical Characteristics

www.DataSheet4U.com

Unless otherwise  $V_{cc1}=5.0V$ ,  $V_{cc2}=7.5V$ ,  $Ta=25^\circ C$ ,  $SW2 \rightarrow a$ ,  $SW3 \rightarrow OFF$ ,  $SW5 \rightarrow ON$ ,  $SW26 \rightarrow OFF$ ,  $SW27 \rightarrow OFF$ ,  $SW29 \rightarrow OFF$ ,  $SW32 \rightarrow OFF$ ,  $SW35 \rightarrow OFF$ ,  $SW38 \rightarrow OFF$ ,  $SW39 \rightarrow OFF$ ,  $SW40 \rightarrow OFF$ ,  $SW42 \rightarrow OFF$ ,  $SW43 \rightarrow OFF$ ,  $V5=2.1V$ ,  $V41=1.7V$ ,  $V18=5.0V$ .

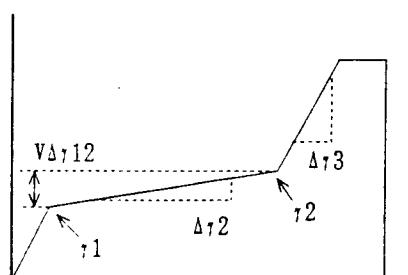
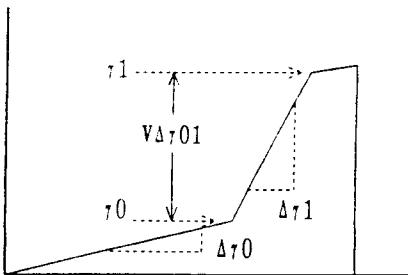
(B1), (G1), (R1), (B2), (G2), (R2) and (A)=GND, SG2 applied to TP45 and TP46  
SG1(5Vp-p) applied to TP47.

No.	Parameter	symbol	Conditions	MIN	TYP	MAX	Units
1	Current dissipation	$I_{cc1}$			13.0	20.0	mA
2	Current dissipation	$I_{cc2}$			10.0	18.0	mA
3	SYNC SEP terminal voltage	$V2$	$SW2 \rightarrow b$	1.6	1.9	2.4	V
4	COM AMP terminal voltage	$V3$		1.7	2.1	2.5	V
5	CONTRAST terminal voltage	$V5$	$SW5 \rightarrow OFF$	1.7	2.1	2.5	V
6	B IN1 terminal voltage	$V6$		1.6	1.9	2.4	V
7	G IN1 terminal voltage	$V8$		1.6	1.9	2.4	V
8	R IN1 terminal voltage	$V9$		1.6	1.9	2.4	V
9	B IN2 terminal voltage	$V13$		1.6	1.9	2.4	V
10	G IN2 terminal voltage	$V14$		1.6	1.9	2.4	V
11	R IN2 terminal voltage	$V15$		1.6	1.9	2.4	V
12	H FIL IN terminal voltage	$V16$		1.6	2.0	2.4	V
13	REG OUT terminal voltage	$V17$		1.0	1.2	1.5	V
14	H FIL OUT terminal voltage	$V19$		3.2	4.0	4.6	V
15	GAMMA 0 terminal voltage	$V26$		1.7	2.1	2.5	V
16	GAMMA 2 terminal voltage	$V27$		1.7	2.1	2.5	V
17	SUB BR B terminal voltage	$V38$		1.7	2.1	2.5	V
18	SUB BR R terminal voltage	$V39$		1.7	2.1	2.5	V
19	RGB AMP terminal voltage	$V40$		1.7	2.1	2.5	V
20	SUB CON B terminal voltage	$V42$		1.7	2.1	2.5	V
21	SUB CON R terminal voltage	$V43$		1.7	2.1	2.5	V
22	SYNC SEP input current	$I2$	$SW2 \rightarrow b$ , $TP2=3.0V$	9.0	14.0	19.0	$\mu A$
23	B IN1 input current	$I6$	$TP47=5V$ , $TP6=2.0V$	-0.1	0	0.1	$\mu A$
24	G IN1 input current	$I8$	$TP47=5V$ , $TP8=2.0V$	-0.1	0	0.1	$\mu A$
25	R IN1 input current	$I9$	$TP47=5V$ , $TP9=2.0V$	-0.1	0	0.1	$\mu A$
26	B IN2 input current	$I13$	$TP47=5V$ , $TP13=2.0V$	-0.1	0	0.1	$\mu A$
27	G IN2 input current	$I14$	$TP47=5V$ , $TP14=2.0V$	-0.1	0	0.1	$\mu A$
28	R IN2 input current	$I15$	$TP47=5V$ , $TP15=2.0V$	-0.1	0	0.1	$\mu A$
29	SW'L' input current	$IL18$	$V18=0V$		-0.5	-4.5	$\mu A$
30	SW'H' input current	$IH18$	$V18=5V$	-0.1	0	0.1	$\mu A$
31	BRIGHT input current	$I41$	$V41=0V$		-0.5	-4.5	$\mu A$
32	COM FRP'L' input current	$IL45$	$V45=0V$		-0.5	-4.5	$\mu A$
33	COM FRP'H' input current	$IH45$	$V45=5V$	-0.1	0	0.1	$\mu A$
34	FRP'L' input current	$IL46$	$V46=0V$		-0.5	-4.5	$\mu A$
35	FRP'H' input current	$IH46$	$V46=5V$	-0.1	0	0.1	$\mu A$
36	SYNC IN'L' input current	$IL47$	$V47=0V$		-0.5	-4.5	$\mu A$
37	SYNC IN'H' input current	$IH47$	$V47=5V$	-0.1	0	0.1	$\mu A$
38	COM AMP input impedance	$Z3$		35	60	100	k $\Omega$
39	CONTRAST input impedance	$Z5$		13	20	40	k $\Omega$
40	H FIL IN input impedance	$Z16$		8	12	18	k $\Omega$
41	GAMMA 0 input impedance	$Z26$		35	60	100	k $\Omega$

No.	Parameter	symbol	Conditions	MIN	TYP	MAX	Units
42	GAMMA 2 input impedance	Z27		35	60	100	kΩ
43	SUB BR B input impedance	Z38		35	60	100	kΩ
44	SUB BR R input impedance	Z39		35	60	100	kΩ
45	RGB AMP input impedance	Z40		35	60	100	kΩ
46	SUB CON B input impedance	Z42		35	60	100	kΩ
47	SUB CON R input impedance	Z43		35	60	100	kΩ

No.	Parameter	symbol	Conditions	MIN	TYP	MAX	units
48	Maximum gain	$G_{MAX}$	With SW26=ON, V5=3.3V, V18=5.0V, V26=3.5V, V41=1.7V and SG3 applied to B1, G1, R1, B2, G2, R2, adjust the amplitude of SG3( $V_{IM}$ ) for making the amplitude (BLK-WHT) of the non-invert signal on TP32 2Vp-p. Then, define the non-invert side of the amplitudes(BLK-WHT) on TP29, TP32 and TP35 as $V_{ROM1}$ , $V_{GOM1}$ and $V_{BOM1}$ . Similarly with V18=0V, as $V_{ROM2}$ , $V_{GOM2}$ and $V_{BOM2}$ . $G_{MAX}=20\log(V_{ROM1}/V_{IM})$ , $20\log(V_{ROM2}/V_{IM})$ , $20\log(V_{GOM1}/V_{IM})$ , $20\log(V_{GOM2}/V_{IM})$ , $20\log(V_{BOM1}/V_{IM})$ , $20\log(V_{BOM2}/V_{IM})$ .	22	25	28	dB
49	Contrast variable range	$\Delta G_c$	With SW26=ON, V5=1.0V, V18=5.0V, V26=3.5V, V41=1.7V and SG3(amplitude: $V_{IM}$ ) applied to B1, G1, R1, B2, G2, R2. Then, define the non-invert side of the amplitudes(BLK-WHT) on TP29, TP32 and TP35 as $V_{RON1}$ , $V_{GON1}$ and $V_{BON1}$ . Similarly with V18=0V, the non-invert side as $V_{RON2}$ , $V_{GON2}$ and $V_{BON2}$ . $\Delta G_c=20\log(V_{ROM1}/V_{RON1})$ , $20\log(V_{ROM2}/V_{RON2})$ , $20\log(V_{GOM1}/V_{GON1})$ , $20\log(V_{GOM2}/V_{GON2})$ , $20\log(V_{BOM1}/V_{BON1})$ , $20\log(V_{BOM2}/V_{BON2})$ .	7	9	11	dB
50	Gain difference among inputs	$\Delta G_i$	With SW26=ON, V5=2.1V, V18=5.0V, V26=3.5V, V41=1.7V and SG3(amplitude: $V_{IM}$ ) applied to B1, G1, R1, B2, G2, R2. Then, define the non-invert side of the amplitudes(BLK-WHT) on TP29, TP32 and TP35 as $V_{ROT1}$ , $V_{GOT1}$ and $V_{BOT1}$ , the invert side of them as $V_{ROT1A}$ , $V_{GOT1A}$ and $V_{BOT1A}$ . Similarly with V18=0V, non-invert side as $V_{ROT2}$ , $V_{GOT2}$ , $V_{BOT2}$ and invert side as $V_{ROT2A}$ , $V_{GOT2A}$ , $V_{BOT2A}$ . $\Delta G_i=20\log(V_{ROT2}/V_{ROT1})$ , $20\log(V_{GOT2}/V_{GOT1})$ , $20\log(V_{BOT2}/V_{BOT1})$ .			$\pm 0.7$	dB
51	Gain difference among RGB	$\Delta G_o$	$\Delta G_o=20\log(V_{GOT1}/V_{ROT1})$ , $20\log(V_{BOT1}/V_{GOT1})$ , $20\log(V_{ROT1}/V_{BOT1})$ , $20\log(V_{GOT2}/V_{ROT2})$ , $20\log(V_{BOT2}/V_{GOT2})$ , $20\log(V_{ROT2}/V_{BOT2})$			$\pm 0.8$	dB
52	Gain difference between invert and non-invert	$\Delta G_{INV}$	$\Delta G_{INV}=20\log(V_{ROT1A}/V_{ROT1})$ , $20\log(V_{ROT2A}/V_{ROT2})$ , $20\log(V_{GOT1A}/V_{GOT1})$ , $20\log(V_{GOT2A}/V_{GOT2})$ , $20\log(V_{BOT1A}/V_{BOT1})$ , $20\log(V_{BOT2A}/V_{BOT2})$			$\pm 0.7$	dB
53	Sub-Contrast variable range	$\Delta G_{sc}$	With SW26=ON, V5=2.1V, V26=3.5V, V41=1.7V, and SG3 applied to B1, G1, R1, adjust the amplitude of SG3 for making the amplitude (BLK-WHT) of non-invert signal on TP32 2V. Then, with SW42=ON, SW43=ON, V42=1.0V, V43=1.0V, define the non-invert side of the amplitudes(BLK-WHT) on TP29 and TP35 as $V_{ROS1}$ , $V_{BOS1}$ . Similarly with V42=3.0V and V43=3.0V, non-invert side as $V_{ROB1}$ and $V_{BOB1}$ .	$\pm 2$	$\pm 3$		dB

No.	Parameter	symbol	Conditions	MIN	TYP	MAX	units
	www.DataSheet4U.com		$\Delta G_{SC} =$ 20LOG( $V_{ROS1}/V_{ROT1}$ ), 20LOG( $V_{BOS1}/V_{BOT1}$ ), 20LOG( $V_{ROB1}/V_{ROT1}$ ), 20LOG( $V_{BOB1}/V_{BOT1}$ ).				
54	RGB outputs maximum amplitude	$V_{BM}$	With $V40=1.7V$ , SW40→ON, measure the amplitudes(BLK-BLK) of TP29, TP32 and TP35.	4.0	4.5		$V_{p-p}$
55	RGB outputs black level voltage difference	$\Delta V_B$	Define the non-invert black levels on TP29, TP32 and TP35 as $V_{RB}$ , $V_{GB}$ and $V_{BB}$ . The invert black levels as $V_{RBA}$ , $V_{GBA}$ , $V_{BBA}$ . $\Delta V_B = V_{RB} - V_{GB}$ , $V_{GB} - V_{BB}$ , $V_{BB} - V_{RB}$ $V_{RBA} - V_{GBA}$ , $V_{GBA} - V_{BBA}$ , $V_{BBA} - V_{RBA}$			$\pm 200$	mV
56	Sub-brightness adjust variable range	$\Delta V_{BS}$	With SW26→ON, $V26=3.5V$ , $V41=1.7V$ and SG3 applied to B1, G1, R1, adjust the amplitude of SG3 for making the amplitude(BLK-WHT) of the non-invert signal on TP32 2V. Then, define the non-invert side of seconde stage(a <sub>2</sub> -GND) amplitudes on TP29 and TP35 as $V_{R2T}$ and $V_{B2T}$ . Similarly, invert side as $V_{R2TA}$ and $V_{B2TA}$ . with SW38→ON, SW39→ON, $V38=1.0V$ , $V39=1.0V$ , similarly as $V_{R2M}$ , $V_{B2M}$ , $V_{R2MA}$ and $V_{B2MA}$ . With $V38=3.2V$ , $V39=3.2V$ , similarly as $V_{R2N}$ , $V_{B2N}$ , $V_{R2NA}$ and $V_{B2NA}$ . $\Delta V_{BS} = V_{R2T} - V_{R2M}$ , $V_{R2TA} - V_{R2MA}$ , $V_{B2T} - V_{B2M}$ , $V_{B2TA} - V_{B2MA}$ , $V_{R2T} - V_{R2N}$ , $V_{R2TA} - V_{R2NA}$ , $V_{B2T} - V_{B2N}$ , $V_{B2TA} - V_{B2NA}$ .	$\pm 0.25$	$\pm 0.50$		V
57	Peak limit characteristics	$V_P$	With $V41=2.5V$ , SG3 applied to B1, G1, R1. Measure the amplitudes(BLK-WHT)of non-invert signals on TP29, TP32 and TP35.	1.4	1.8	2.2	V
58	RGB outs DC voltage	$V_c$	Measure the average voltages of TP29, TP32 and TP35.	2.30	2.50	2.70	V
59	Frequency characteristic	$f_c$	With SW26→ON, SW29→ON, SW32→ON, SW35→ON, $V26=3.5V$ , $V41=1.7V$ and SG5( $f=100kHz$ )applied to R1, G1, B1, adjust the amplitude of SG5 for making the amplitude of sine wave part of the non-invert signal on TP32 2V. Increase the frequency on TP29, TP32 and TP35 until attenuate by 3dB from the amplitude at the 100kHz.	5.0	6.5		MHz
60	Crosstalk among RGB	$CT_{RGB}$	With SW26→ON, $V26=3.5V$ , $V41=1.7V$ , TP46=0V, and SG5( $f=1MHz$ ) applied to G1. Adjust the amplitude of SG5( $V_1$ )for making the amplitude of sine wave part of the non-invert signal on TP32 2V. Measure the amplitudes of 1MHz component on TP29, TP32 and TP35. Calculate the amplitude ratios of TP29 and TP35 to TP32. Similarly,with SG5 ( $f=1MHz$ . amplitude= $v_i$ ) applied to B1, measure the ratios of TP29 and TP32 to TP35. Similarly, with SG5( $f=1MHz$ , amplitude= $v_i$ ) applied to R1, measure the ratios of TP32 and TP35 to TP29.	40	50		dB




No.	Parameter	symbol	Conditions	MIN	TYP	MAX	units
61	Crosstalk between RGB inputs (IN1→IN2)	CT <sub>12</sub>	With SW26→ON, V26=3.5V, V41=1.7V, TP46=0V, V18=5V and SG5(f=1MHz, amplitude=v <sub>1</sub> ) applied to B1, measure the amplitude of 1MHz component on TP35. Then with V18=0V, measure the attenuation of 1MHz component on TP35. Similarly , to G1 and R1, measure one on TP32 and TP35.	40	50		dB
62	Crosstalk between RGB inputs	CT <sub>21</sub>	With SW26→ON, V26=3.5V, V41=1.7V, TP46=0V, V18=0V and SG5(f=1MHz, amplitude=v <sub>1</sub> ) applied to B2. measure the amplitude of 1MHz component on TP35. Then with V18=5V, measure the attenuation of 1MHz component on TP35. Similarly , to G2 and R2, measure one on TP32 and TP35.	40	50		dB
63	COM OUT maximum amplitude	V <sub>v<sub>M</sub></sub>	With V3=3.0V, V41=1.0V, measure the amplitude on TP4.	5.0	5.4		V <sub>p-p</sub>
64	COM OUT amplitude	DV <sub>COM</sub>	With SW3→ON, V3=2.05V, V41=2.0V, measure the amplitude on TP4.	1.25	1.55	1.85	V <sub>p-p</sub>
65	COM OUT amplitude adjustable range (1)	ΔV <sub>c1</sub>	With V3=1.0V, V41=1.0V, measure the amplitude on TP4, define it as V <sub>CN</sub> . ΔV <sub>c1</sub> =V <sub>CM</sub> -V <sub>CN</sub> (In case of the contrary phase, define ΔVC1 as follows: ΔV <sub>c1</sub> =V <sub>CM</sub> +V <sub>CN</sub> .)	7.5	8.2	9.0	V
66	COM OUT amplitude adjustable range (2)	ΔV <sub>c2</sub>	With V3=1.0V, V41=2.4V, measure the amplitude on TP4, define it as V <sub>CT</sub> . ΔV <sub>c2</sub> =V <sub>CM</sub> -V <sub>CT</sub> (In case of the contrary phase, define ΔVC1 as follows: ΔV <sub>c1</sub> =V <sub>CM</sub> +V <sub>CT</sub> .)	9.5	10.8		V
67	RGB outputs amplitude adjustable range	ΔV <sub>RGB</sub>	With SW40→ON, measure the differences of the amplitudes(BLK-BLK) on TP29, TP32 and TP35, between V40=1.7V and V40=3.2V.	1.5	2.2		V
68	Gamma characteristic(1)	Δγ <sub>3</sub>	With V41=2.05V and SG4 applied to B1, G1 and R1, measure the slopes on TP29, TP32 and TP35.		220		mV/μs
69	Gamma characteristic(2)	Δγ <sub>2</sub>			50		mV/μs
70	Gamma characteristic(3)	Δγ <sub>1</sub>			220		mV/μs
71	Gamma characteristic(4)	Δγ <sub>0</sub>			50		mV/μs
72	Gamma characteristic(5)	VΔγ01			2.0		V
73	Gamma characteristic(6)	VΔγ12			1.5		V


No.	Parameter	symbol	Conditions	MIN	TYP	MAX	units
74	Common-Gamma tracking ratio	R <sub>T</sub>	With SW26→ON, SW27→ON, V3=2.2V, V26=3.5V, V27=3.0V and SG3(0dB) applied to B1, G1, R1, changing V41=1.9V to 2.3V define the change of the amplitude between the BLACK level and the 7th state level(a0-a7) of the non-invert signals on TP29, TP32, TP35 as $\Delta V_B$ . Define the change of the amplitude on TP4 as $\Delta V_c$ . RT=(2ΔV <sub>B</sub> /ΔV <sub>c</sub> )*(ΔV <sub>1</sub> /(ΔV <sub>1</sub> -ΔV <sub>2</sub> )) Use the result of No. 68 and No. 69 for ΔV <sub>1</sub> and ΔV <sub>2</sub> .	2.5	3.0	3.5	
75	SW pin "HI" level input voltage	V <sub>Hsw</sub>		2.0			V
76	SW pin "LOW" level input voltage	V <sub>Lsw</sub>				0.8	V
77	COM FRP pin "HI" level input voltage	V <sub>Hcf</sub>		2.0			V
78	COM FRP pin "LOW" level input voltage	V <sub>Lcf</sub>				0.8	V
79	FRP pin "HI" level input voltage	V <sub>Hf</sub>		2.0			V
80	FRP pin "LOW" level input voltage	V <sub>Lf</sub>				0.8	V
81	SYNC IN pin "HI" level input voltage	V <sub>hs</sub>		2.0			V
82	SYNC IN pin "LOW" level input voltage	V <sub>ls</sub>				0.8	V
83	Sync separator in. sensitivity current	I <sub>is</sub>	With SW2→b, measure the input current on TP2 that causes TP48 to change from "L" to "H".		21	30	μA
84	Sync sep. output ON-state voltage	V <sub>on</sub>	Measure the voltage on TP48		0.2	0.5	V
85	sync sep. output OFF-state leakage current	I <sub>sl</sub>	With SW2→b and TP48=10V, drawing the 40μA current from TP2 , measure the current from TP48 to pin 48.			1.0	μA
86	H FIL OUT gain	G <sub>ht</sub>	With SG1(0.286V <sub>p-p</sub> )applied to (A), measure the voltage on TP19 for v <sub>ht</sub> . G <sub>ht</sub> =20LOG(v <sub>ht</sub> /0.286)	1.0	2.3		dB
87	Sync separator output propagation delay time	t <sub>PHL</sub> (SY)	With SG1(0.286V <sub>p-p</sub> )applied to (A), measure the propagation delay time.		0.6		μs
		t <sub>PLH</sub> (SY)			1.0		μs
88	Sync separator output fall time output rise time	t <sub>HL</sub> (SY)	With SG1(0.286V <sub>p-p</sub> )applied to (A), measure the fall time and the rise time on TP48		0.2		μs
		t <sub>LH</sub> (SY)			0.5		μs

No.	Parameter	symbol	Conditions	MIN	TYP	MAX	units
89	RGB outputs propagation delay time	$t_{PHL}$ (RGB)	With SW26→ON, V18=5V, V26=3.5V, V41=1.7V, and SG6 applied to G1, adjust the amplitude of SG6 for making the amplitude (BLK-WHT) of the non-invert signal on TP21 2V, define it as $v_1$ .		0.1		μs
		$t_{PLH}$ (RGB)			0.1		μs
90	RGB outputs fall time rise time	$t_{tHL}$ (RGB)	Measure the delay time from G1 to TP32, and the fall time and rise time on TP32. Similarly, measure the delay time from B1 and R1 to TP29 and TP35 and the fall time and the rise time on TP29 and TP35. Similarly with V18=0V, measure delay time, fall time and rise time from B2, G2 and R2 to TP29, TP32 and TP35.		0.2		μs
		$t_{tLH}$ (RGB)			0.2		μs
91	FRP square wave propagation delay	$t_{PHL}$ (FRP)	Measure the propagation delay times from TP46 to TP29, TP32 and TP35.		0.1		μs
		$t_{PLH}$ (FRP)			0.1		μs
92	FRP square wave rise time fall time	$t_{tHL}$ (FRP)	Measure the fall times and rise times of output signals on TP29, TP32 and TP35.		0.1		μs
		$t_{tLH}$ (FRP)			0.1		μs
93	COM output propagation	$t_{PHL}$ (COM)	Measure the propagation delay time from TP45 to TP4.		0.1		μs
		$t_{PLH}$ (COM)			0.1		μs
94	COM output rise time fall time	$t_{tHL}$ (COM)	Measure the rise time and fall time of TP4.		0.1		μs
		$t_{tLH}$ (COM)			0.1		μs
95	SW propagation delay time	$t_{PHL}$ (SW)	With SW26→ON, V18=5V, V26=3.5V, V41=1.7V, SG6 applied to B1, G1, R1, adjust the amplitude of SG6 for making the amplitude (BLK-WHT) of the non-invert signal on TP32 2V. Then with SG7 applied to TP8, observe the waveform on SG7, TP29, TP32 and TP35.		0.1		μs
		$t_{PLH}$ (SW)			0.1		μs
96	SW rise time fall time	$t_{tHL}$ (SW)			0.1		μs
		$t_{tLH}$ (SW)			0.1		μs


No.	signal name	waveform
SG1	sync signal	<p>variable amplitude</p> <p>0V</p> <p>5μs      64μs</p> <p>tr, tf&lt;50ns</p>
SG2	FRP square wave	<p>tr, tf&lt;50ns</p> <p>2.5μs</p> <p>SG1</p>
SG3	Variable APL 10stage atair wave signal	<p>0 dB waveform</p> <p>a10</p> <p>a9</p> <p>a8</p> <p>a7</p> <p>a6</p> <p>a5</p> <p>a4</p> <p>a3</p> <p>a2</p> <p>a1</p> <p>a0</p> <p>0.714V</p> <p>0.286V</p> <p>5μs      64μs</p>
SG4	ramp waveform	<p>0.714V</p> <p>0.286V</p> <p>5μs      14μs      36μs      7μs</p> <p>64μs</p>

No.	signal name	waveform
SG5	Sine wave	<p>Variable frequency and amplitude sine wave video signal.</p> <p>0.714V</p> <p>0.286V</p>
SG6	Complete white video signal	<p>0.714V</p> <p>43μs</p> <p>14μs</p> <p>64μs</p> <p>5μs</p> <p>0.286V</p>
SG7	SW signal	<p>Synchronised with SG1 pulse</p> <p>5V</p> <p>0V</p> <p>15μs</p> <p>25μs</p> <p>5μs</p> <p>64μs</p> <p>SG1</p>

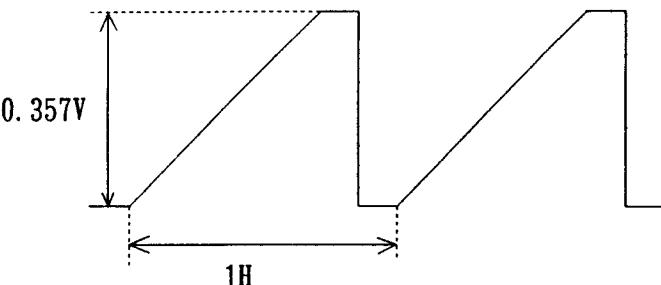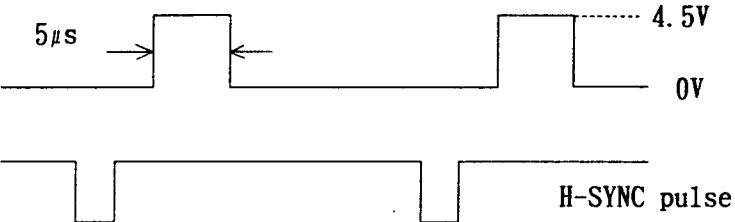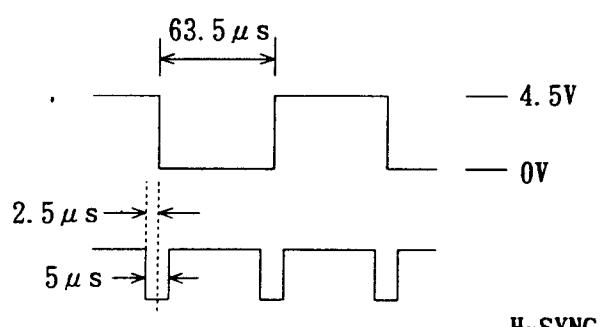S G   N o .	w a v e f o r m
SG 9	 <p>www.DataSheet4U.com</p>
SG 10	<p>tr, tf&lt;50ns</p>  <p>H-SYNC pulse</p> <p>Synchronised with H-SYNC pulse</p>
SG 11	<p>FRP square wave tr, tf &lt; 50ns</p>  <p>H-SYNC pulse</p>

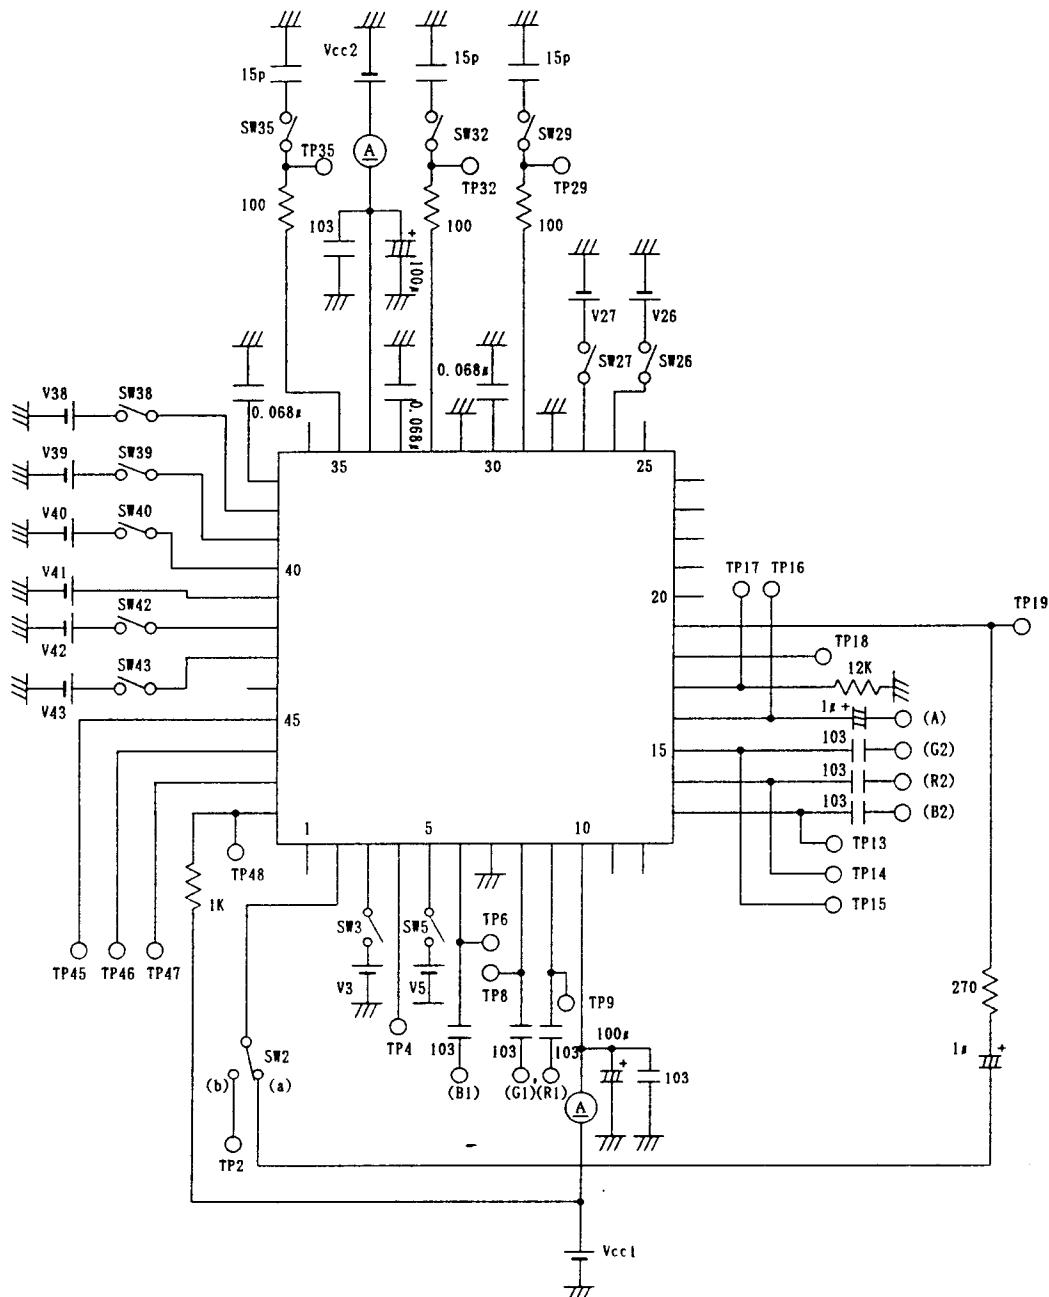**T e s t C i r c u i t**

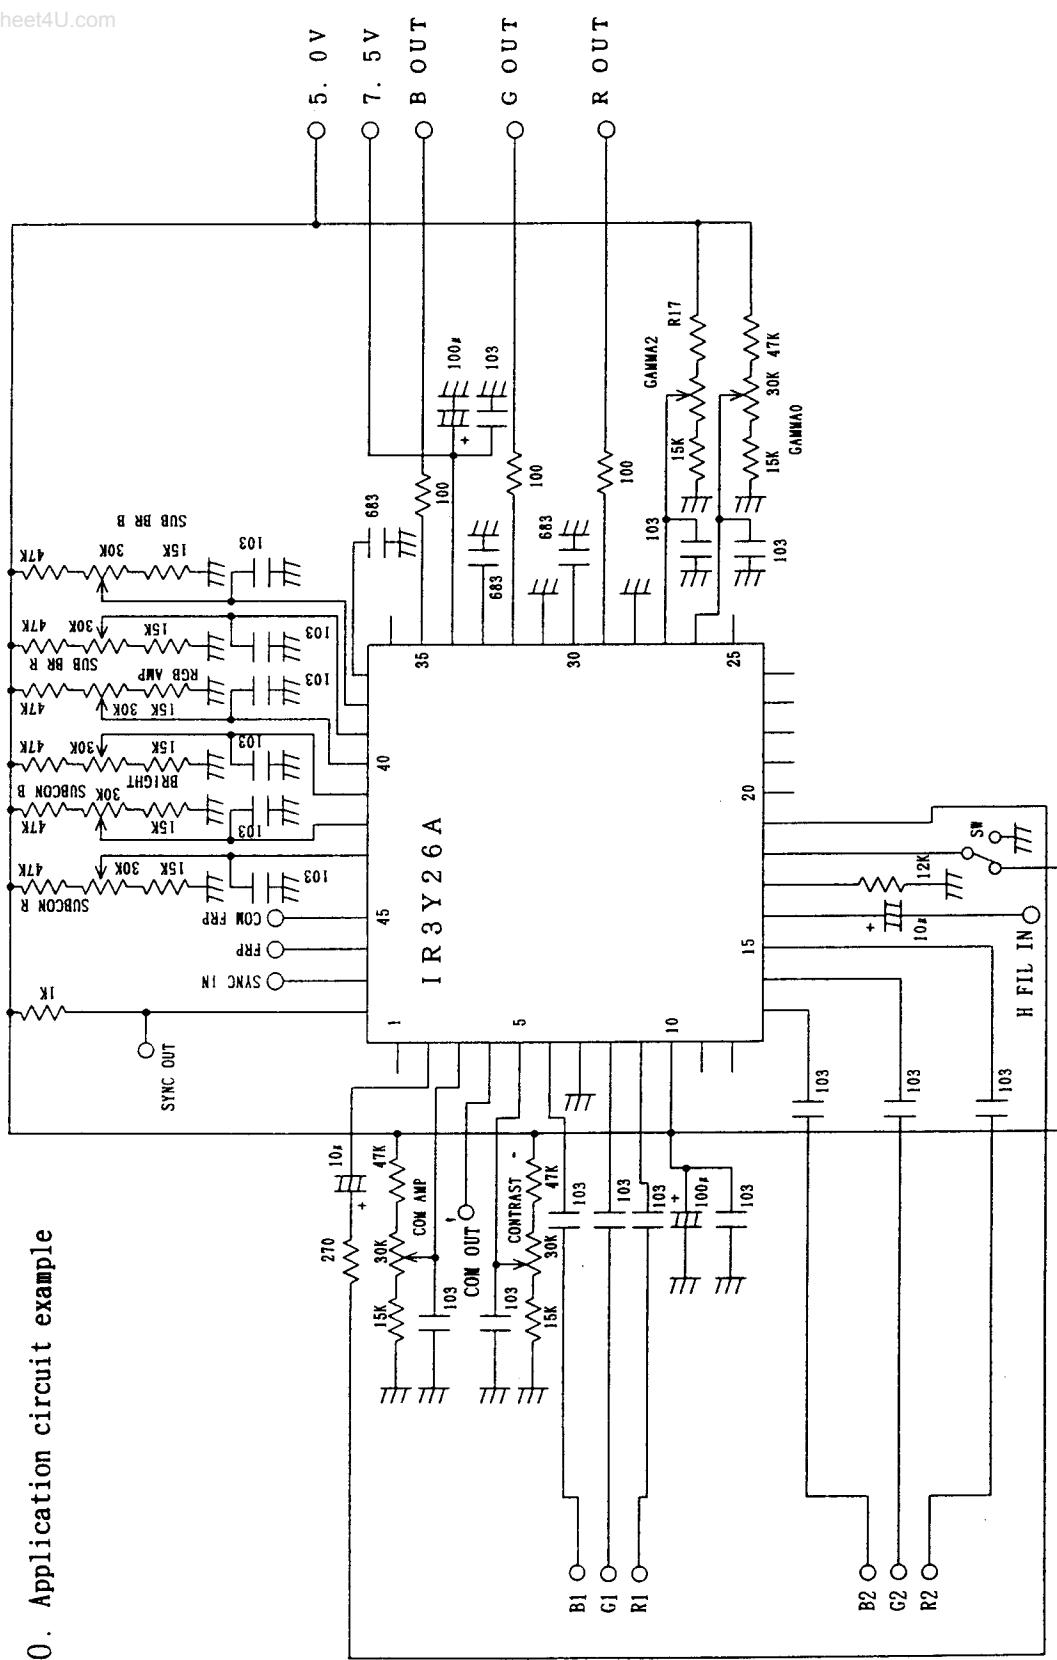10. Application circuit example



## 11 Package and packing specification

## 1. Package Outline Specification

Refer to drawing No. AA873

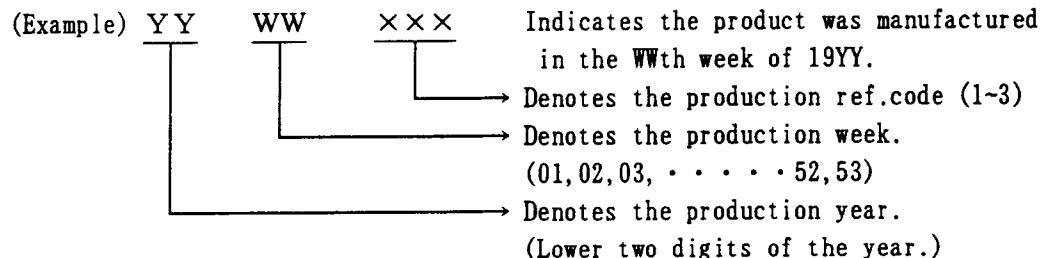
## 2. Markings

## 2-1. Marking contents

(1) Product name : I R 3 Y 2 6 A

(2) Company name : SHARP

(3) Date code



(4) The marking of "JAPAN" indicates the country of origin.

## 2-2. Marking layout

Refer to drawing No. AA873

(This layout do not define the dimensions of marking character and marking position.)

## 3. Packing Specification

## 3-1. Packing materials

Material Name	Material Specification	Purpose
Tray	Conductive plastic (80devices/tray)	Fixing of device
Upper cover tray	Conductive plastic (1tray/case)	Fixing of device
Laminated aluminum bag	Aluminum polyethylene (1bag/case)	Drying of device
Desiccant	Silica gel	Drying of device
P P band	Polypropylene (3pcs)	Device tray fixing
Inner case	Card board (800devices/case)	Packaging of device
Label	Paper	Indicates part number, quantity and date of manufacture
Outer case	Cardboard	Outer packing of device case

(Devices shall be placed into a tray in the same direction.)

## 3-2. Outline dimension of tray

Refer to attached drawing

## 4. Precaution For Unpacking

- (1) Unpacking should be done on the stand as well as human body treated with anti-ESD.
- (2) Conductive treatment or anti-ESD treatment is given to a dray.  
Use the equivalent tray, if it is changed to another one.

## 5. Surface Mount Conditions

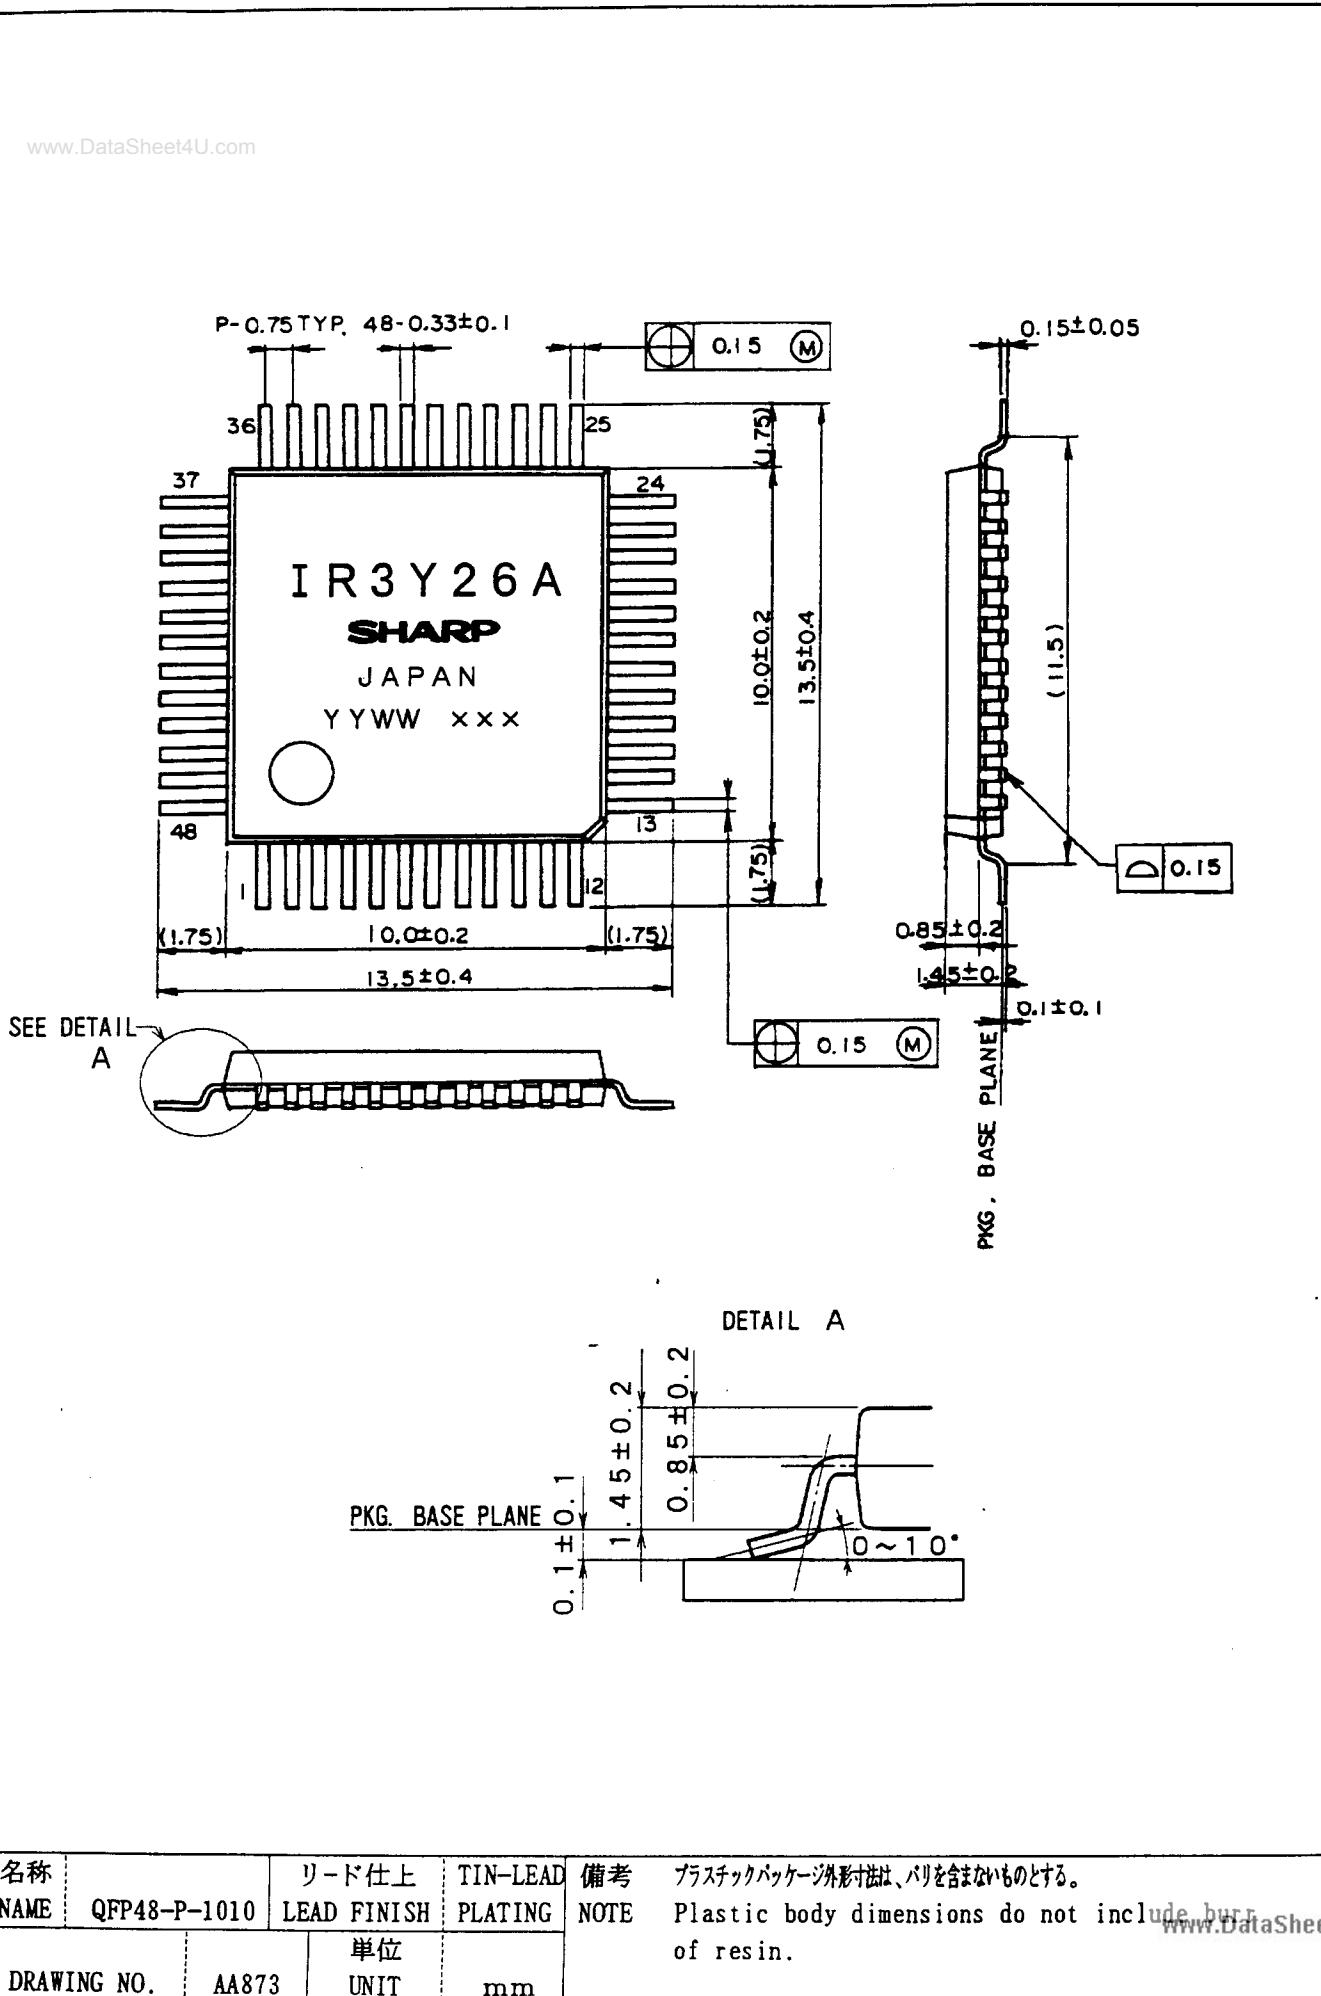
Please perform the following conditions when mounting ICs not to deteriorate IC quality.

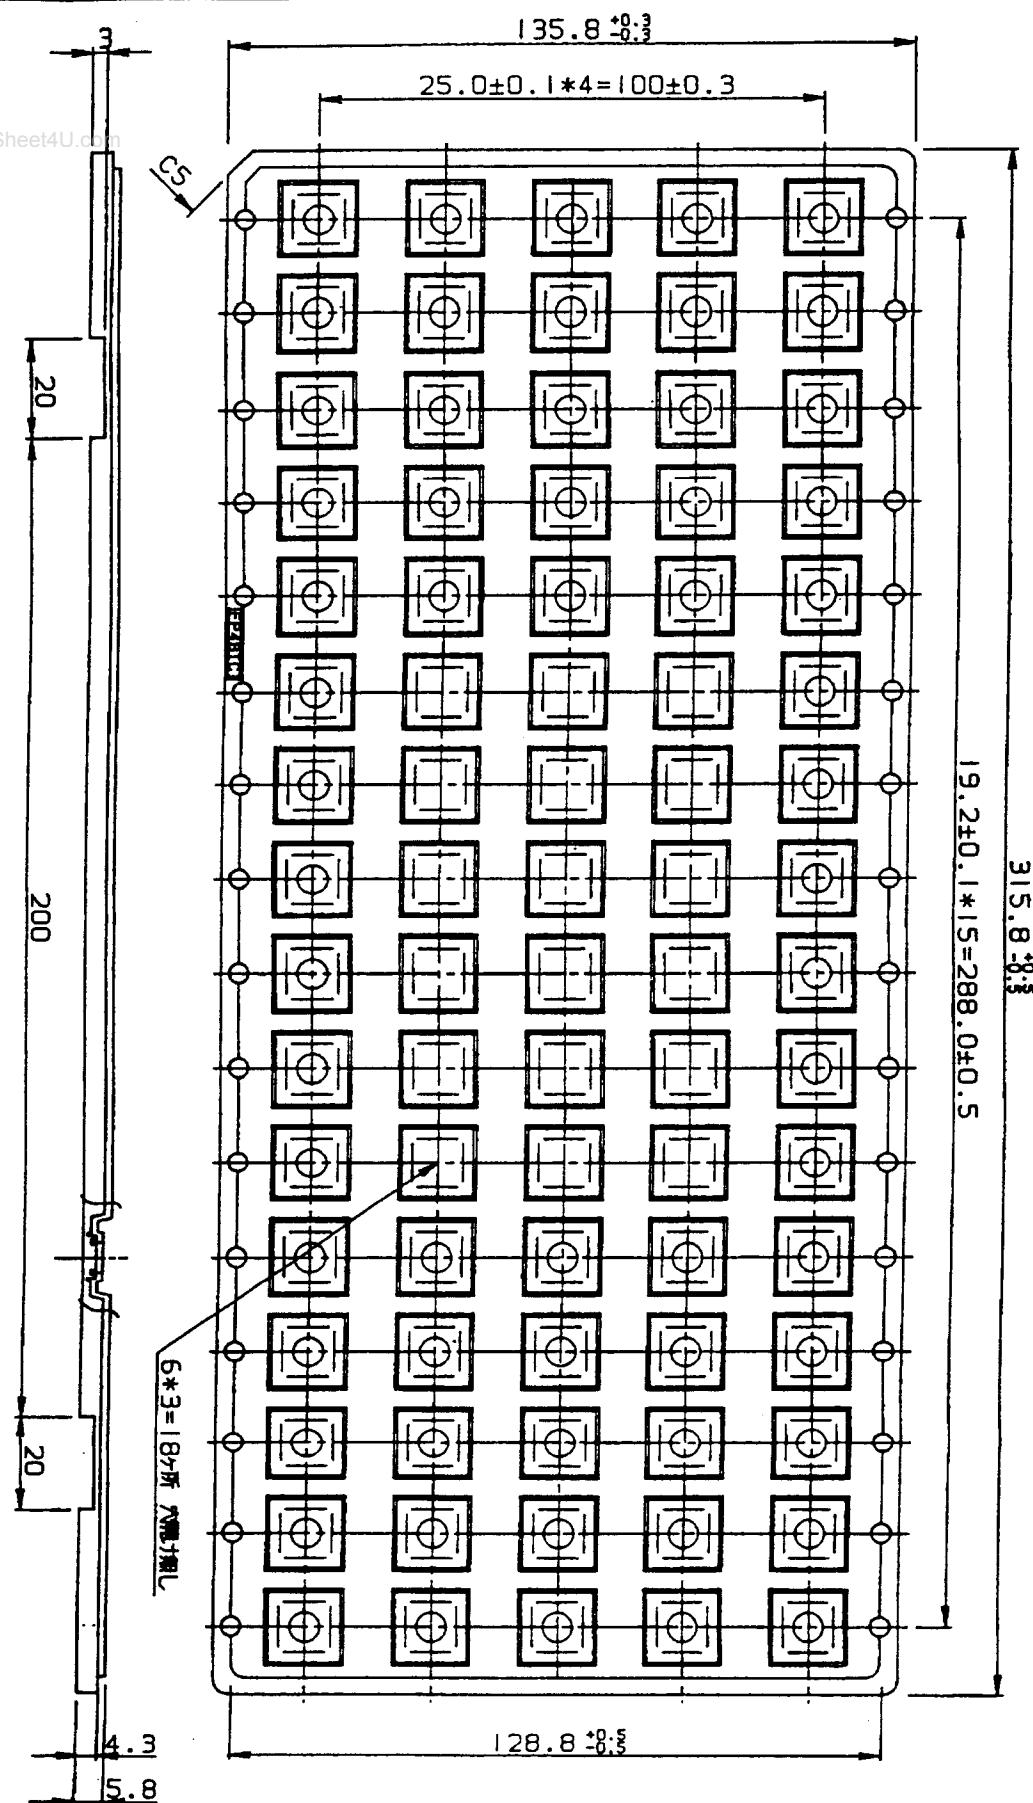
### 5-1. Soldering conditions (The following conditions are valid only for one time soldering.)

Mounting Method	Temperature and Duration	Measurement Point
Reflow soldering (air)	Peak temperature of 240°C, duration less than 15 seconds above 230°C, temperature increase rate of 1~4°C/second	IC surface
Solder dipping	245°C or less, duration less than 3 seconds/dip, total of 5 seconds	Solder bath
Vapor phase soldering	215°C or less, duration less than 40 seconds above 200°C	Steam
Manual soldering (soldering iron)	260°C or less, duration less than 10 seconds	IC outer lead surface

### 5-2. Conditions for removal of residual flux

- (1) Ultrasonic washing power : 25 Watts/liter or less
- (2) Washing time : Total 1 minute maximum
- (3) Solvent temperature : 15~40°C





名称 NAME	F P 4 8 T C I			備考 NOTE
DRAWING NO.	CV561	单位 UNIT	mm	