


GENERAL INFORMATION

Pin Configuration

The pin map is shown as below for SOP8.

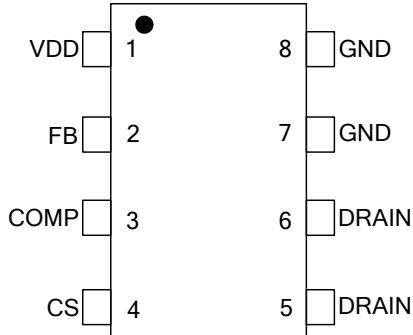

Ordering Information

Part Number	Description
OB3613YCP	8 Pin SOP, Pb free in Tube
OB3613YCPA	8 Pin SOP, Pb free in T&R

Note: All Devices are offered in Pb-free Package if not otherwise noted.


Package Dissipation Rating

Package	R θ JA (°C/W)
SOP8	90


Absolute Maximum Ratings

Parameter	Value
VDD Voltage	-0.3 to 40V
DRAIN Voltage	-0.3 to 600V
CS Input Voltage	-0.3 to 7V
FB Input Voltage	-0.3 to 7V
COMP Input Voltage	-0.3 to 7V
Min/Max Operating Junction Temperature T _J	-40 to 150 °C
Min/Max Storage Temperature T _{stg}	-55 to 150 °C
Lead Temperature (Soldering, 10secs)	260 °C


Note: Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute maximum-rated conditions for extended periods may affect device reliability.

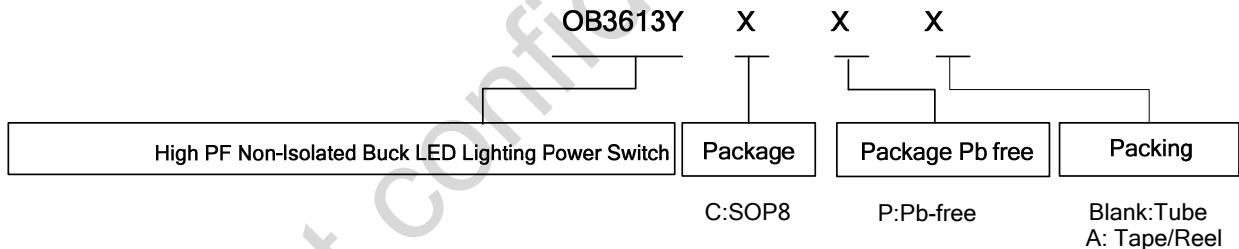

BLOCK DIAGRAM

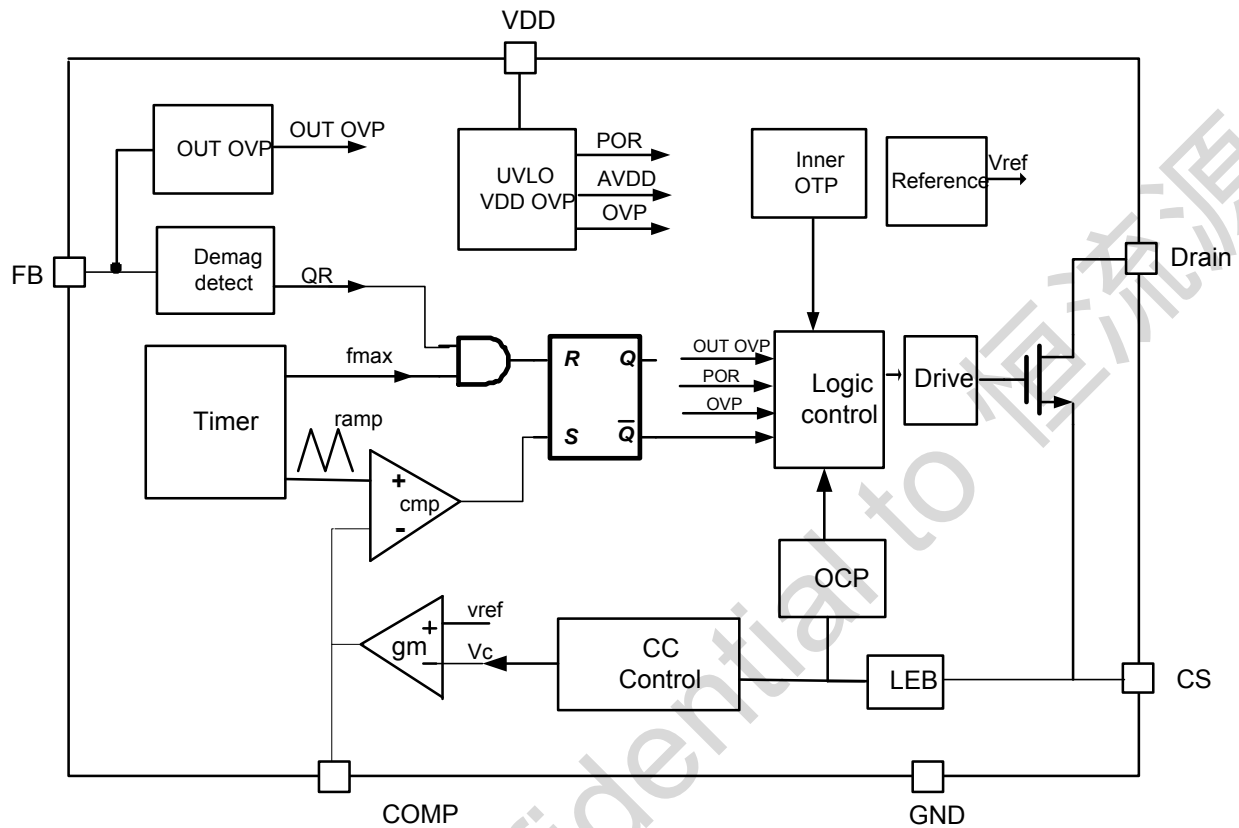

Marking Information

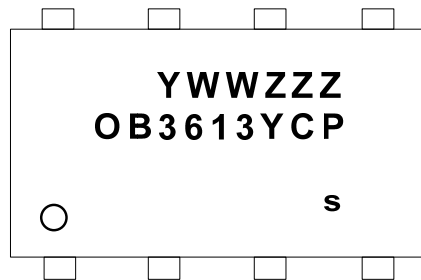

Y: Year Code
 WW: Week Code (01-52)
 ZZZ: Lot Code
 C: SOP8
 P: Pb-free Package
 s: Internal Code(Optional)

TERMINAL ASSIGNMENTS








Pin Num	Pin Name	I/O	Description
1	VDD	P	Power supply Input.
2	FB	I	The voltage feedback from auxiliary winding. Connected to resistor divider from auxiliary winding reflecting output voltage.
3	COMP	O	Loop compensation pin. A capacitor is connected between COMP and GND.
4	CS	I	Current sensing terminal.
5,6	DRAIN	I	MOSFET Drain Terminal
7	GND	P	Power Ground, suggest to be left floating with no pad in PCB layout.
8	GND	P	Power Ground

ELECTRICAL CHARACTERISTICS

(TA = 25°C, VDD=20V, if not otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ.	Max	Unit
Supply Voltage (VDD) Section						
I _{start-up}	Start up current	VDD=UVLO(OFF)-1V		3	7	uA
I _{op}	Operation current	VDD=20V, no loading		1.5	2.2	mA
UVLO(OFF)	VDD under voltage lockout exit		24	25.5	27	V
UVLO(ON)	VDD under voltage lockout enter		8	9	10	V
VDD_OVP	VDD Over Voltage Protection		32	35	38	V
Current Sense Input Section						
TLEB	LEB time			0.3		us
V _{th_ocr}	Over Current Threshold	FB>0.45V	1.0	1.15	1.3	V
		FB<0.45V		0.5		V
FB Input Section						
V _{out_ovp}	Output Over Voltage Protection		3.4	3.5	3.6	V
V _{out_scp}	Output Short Circuit Protection			0.45		V
QR Section						
F _{max}	Maximum Working Frequency			100		KHz
T _{off_max}	Maximum Off Time	COMP=4.2V		70		us
T _{off_min}	Minimum Off Time	CS>0.15V		2		us
		CS<0.15V		0.5		us
T _{on_max}	Maximum On Time	COMP=4.2V		25		us
Error Amplifier Section						
V _{ref}	Error Amplifier Reference Voltage		0.196	0.200	0.204	V
G _m	Error Amplifier Transconductance			50		us
I _{source_max}	Error Amplifier Maximum Source Current			10		uA
I _{sink_max}	Error Amplifier Maximum Sink Current			50		uA
V _{clamp_COMP}	COMP Pin Down_clamp Voltage			1.2		V
Power MOSFET Section						
BV _{dss}	MOSFET Drain-Source Breakdown Voltage		600			V
R _{ds,on}	On resistance			6.5		ohm

CHARACTERIZATION PLOTS

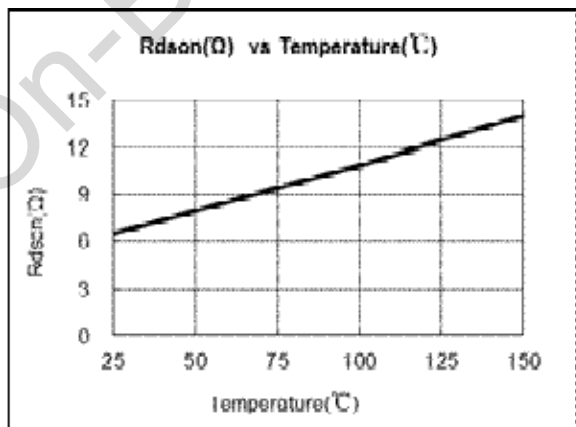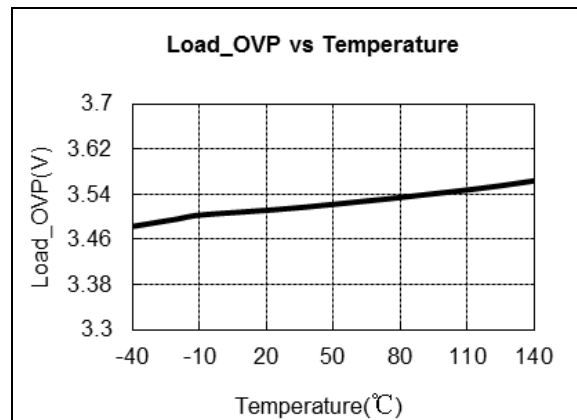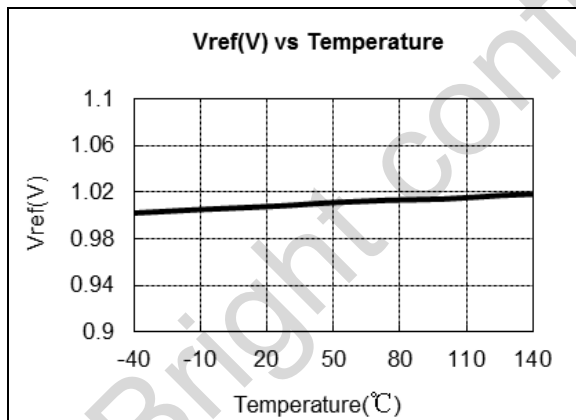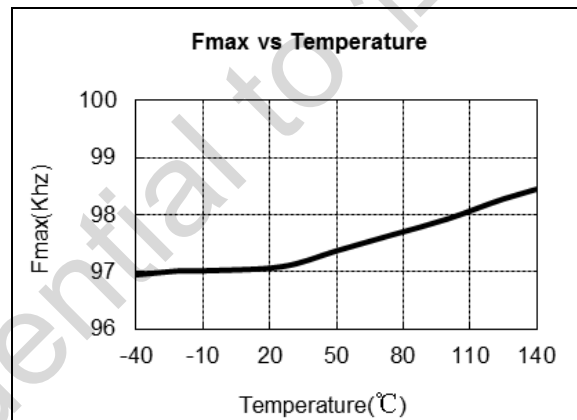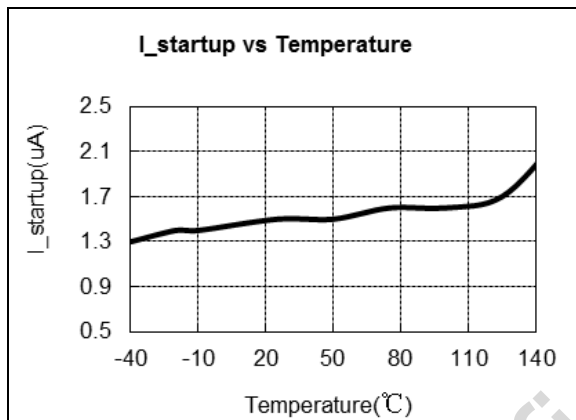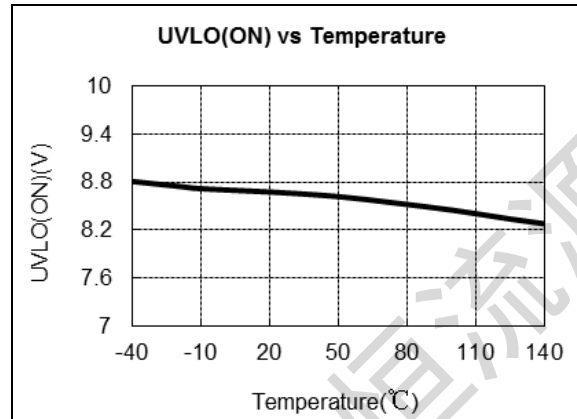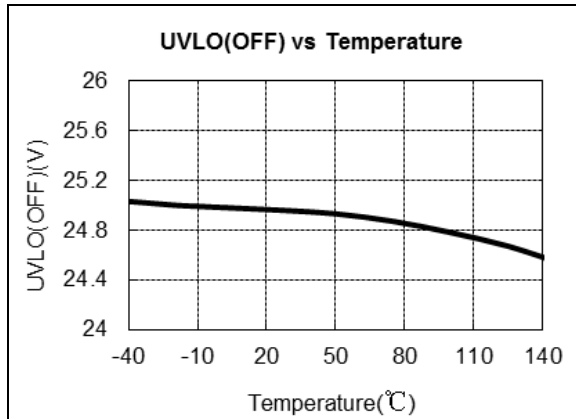

OPERATION DESCRIPTION

OB3613Y is a high power factor, highly integrated buck regulator with advanced features to provide high efficiency control and high precision constant current output for LED lighting applications. It integrates a 1.5A MOSFET and provides LED open/short protection.

● Start up Control

Low start-up current is designed in OB3613Y so that VDD could be charged up above UVLO threshold with small charging current. A large value startup resistor can therefore be used to minimize the power loss in application.

The capacitor at COMP pin is pulled up quickly during starting up until its voltage reaches 1.2V. Then the error amplifier charges the COMP pin capacitor with a transconductance of about 500uS (typical), and the Gate drives external power MOSFET at minimum frequency for low power dissipation. At the startup, the threshold voltage of OCP is set at 0.5V (typical). When the voltage at FB pin reaches 0.45V (typical), the threshold voltage of OCP is increased to 1V (typical). When the voltage at FB pin increases and reaches 1.2V (typical), the transconductance of error amplifier is reduced to 50uS (typical).

● LED Constant Current Regulation

OB3613Y uses the constant current control method to accurately control the LED current. It detects LED current and forces the average LED current equals to the ratio of reference voltage to resistance at CS pin as shown in the equation below.

$$I_{LED} = \frac{V_{ref}}{R_{CS}}$$

R_{CS} — The sensing resistor connected between the MOSFET source and the GND pin of IC.

V_{ref} — Internal reference voltage.

● PFC

The duration of the turn on period t_{on} is generated by comparing an internal fixed saw-tooth wave with the voltage on the COMP pin. During steady state operation, the voltage on the COMP pin

V_{comp} is slowly varying due to a large external capacitor connected at the COMP pin, therefore the turn on time t_{on} is constant. In a buck topology, constant turn on time.

● Current Sensing and Leading Edge Blanking

Cycle-by-Cycle current limiting (OCP) is offered in OB3613Y. The switching current is detected by a sense resistor connected between the CS pin and GND. An internal leading edge blanking circuit chops off the sense voltage spike at initial MOSFET on state due to wheel diode reverse recovery so that the external RC filter is no longer required. The current limit comparator is disabled at this blanking time and thus the external MOSFET cannot be turned off during this blanking time.

● LED Open/Output OVP Protection

When LED string is open, an output over-voltage condition is monitored independently by the voltage at pin FB. During normal operation, when the voltage at FB pin exceeds a threshold of approximately 3.5V (typical), the over-voltage protection function is activated and the GATE is turned off immediately until VDD voltage drops below UVLO (ON), and the device enters power on startup sequence thereafter.

● VDD Over Voltage Protection


VDD is supplied from the BUCK output as shown in the typical application diagram. When VDD is higher than 35V (typical), VDD OVP protection is triggered and OB3613Y is shut down, and the device enters power on startup sequence thereafter.

● LED Short Circuit Protection

When LED string is short, the voltage at FB pin drops to below a threshold of approximately 0.45V (typical), the IC will work at minimum frequency and the threshold voltage of OCP is reduced to 0.5V (typical). The power dissipation is greatly reduced in this way. When the VDD voltage drops to UVLO(ON), the device enters power on startup sequence thereafter.

PACKAGE MECHANICAL DATA

SOP8 PACKAGE OUTLINE DIMENSIONS

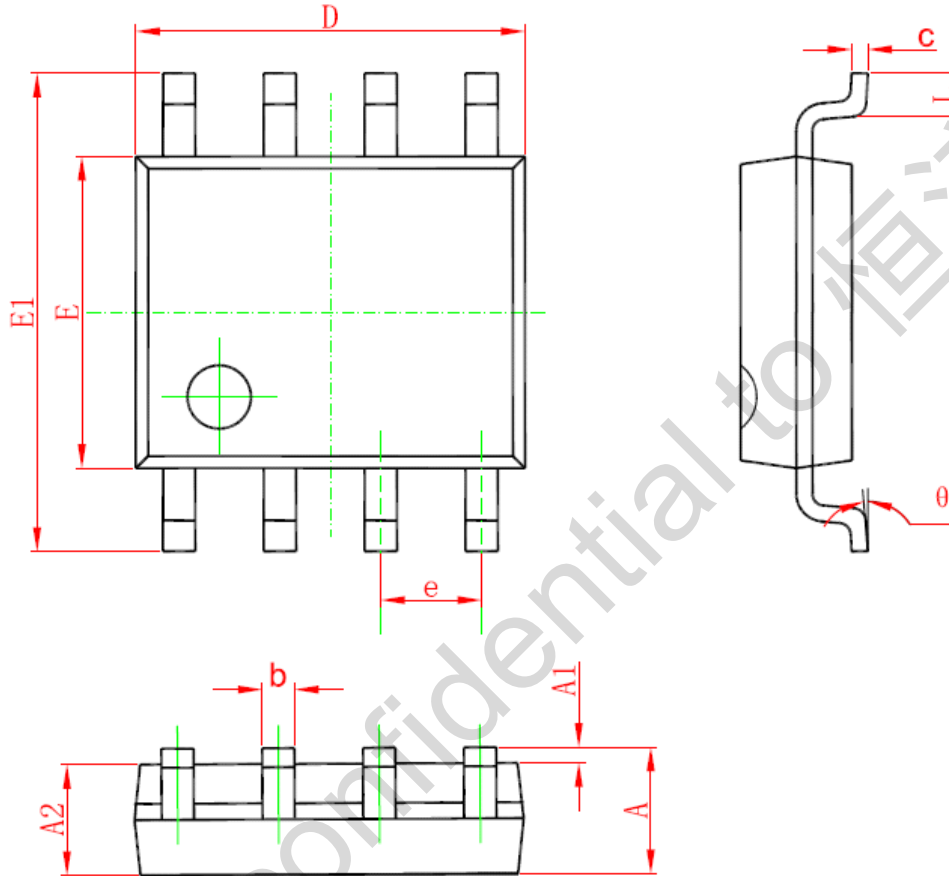

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	4.700	5.150	0.185	0.203
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

IMPORTANT NOTICE

RIGHT TO MAKE CHANGES

On-Bright Electronics Corp. reserves the right to make corrections, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

WARRANTY INFORMATION

On-Bright Electronics Corp. warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used to the extent it deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed. On-Bright Electronics Corp. assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using On-Bright's components, data sheet and application notes. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

LIFE SUPPORT

On-Bright Electronics Corp.'s products are not designed to be used as components in devices intended to support or sustain human life. On-bright Electronics Corp. will not be held liable for any damages or claims resulting from the use of its products in medical applications.

MILITARY

On-Bright Electronics Corp.'s products are not designed for use in military applications. On-Bright Electronics Corp. will not be held liable for any damages or claims resulting from the use of its products in military applications.