



SINGLE PHASE BRIDGE RECTIFIER

W005L THRU W10L

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
1.5 Ampere

FEATURES

- Plastic package has UL flammability Classification 94V-0
- This series UL recognized
- High Surge current capability
- High temperature soldering guaranteed: 260°C / 10 seconds

MECHANICAL DATA

- Case: Molded plastic body
- Terminal: Plated leads solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.05 ounce, 1.42 gram

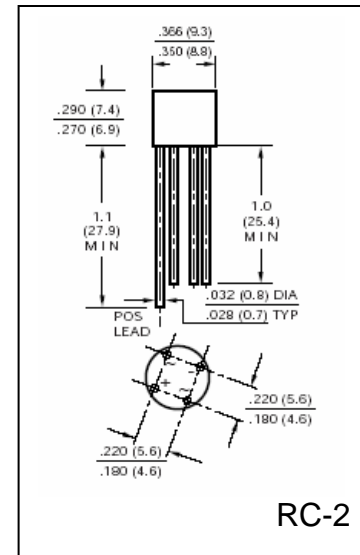

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	W 005L	W 01L	W 02L	W 04L	W 06L	W 08L	W 10L	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, At T _C = 25°C (Note 1)	I _(AV)	1.5							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	50							Amps
Rating for Fusing (t<8.3mS)	I ² t	10							A ² s
Maximum Instantaneous Forward Voltage per element at 1.0A	V _F	1.0							Volts
Maximum DC Reverse Current at Rated T _A = 25 °C	I _R	10							μA
DC Blocking Voltage per element T _A = 100 °C		500							
Typical Junction Capacitance, per leg (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C _J	15							pF
Typical Thermal Resistance per leg (Note 1)	R _{0JA}	40							°C/W
Operating Junction Temperature Range	T _J	(-55 to +125)							°C
Storage Temperature Range	T _{STG}	(-55 to +150)							°C

Notes:

1. Mounted on PCB with 0.22" x 0.22" (5.5mm x 5.5mm) copper pads and 0.375" (9.5mm) lead length



RATINGS AND CHARACTERISTIC CURVES W005L THRU W10L

FIG.1-DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT

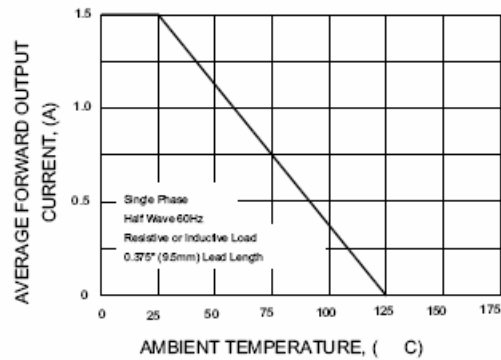


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT

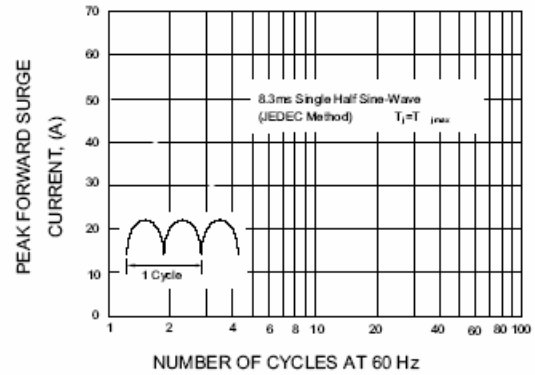


FIG.3-TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT

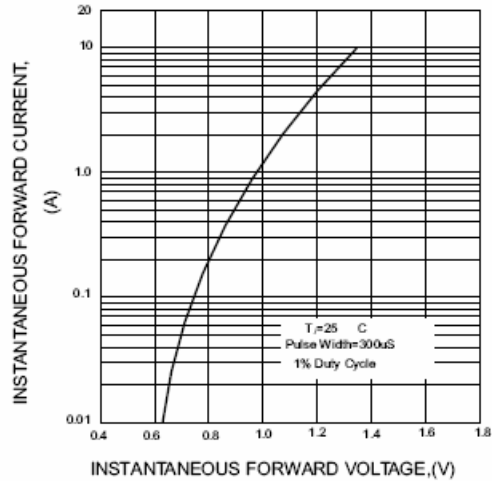


FIG.4-TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT

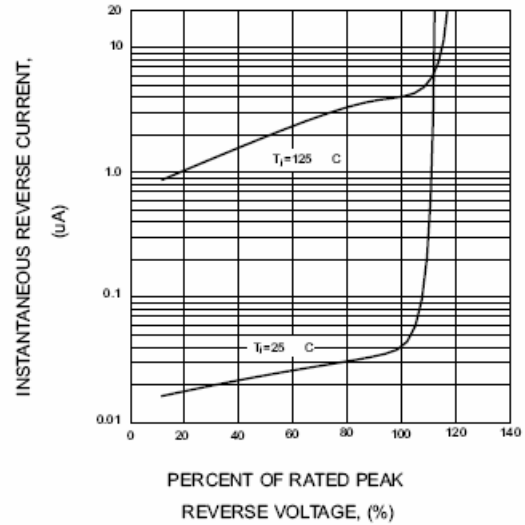


FIG.5-TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

