




# HER601 THRU HER608

## HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current -6.0 Amperes

**R-6**

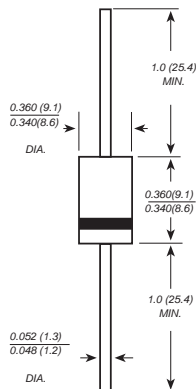

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ High speed switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** R-6 molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.072 ounce, 2.05 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	HER 601	HER 602	HER 603	HER 604	HER 605	HER 606	HER 607	HER 608	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length at T <sub>A</sub> =50°C	I <sub>(AV)</sub>	6.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	200.0								Amps
Maximum instantaneous forward voltage at 6.0A	V <sub>F</sub>	1.0			1.3		1.70			Volts
Maximum DC reverse current    T <sub>A</sub> =25°C at rated DC blocking voltage    T <sub>A</sub> =100°C	I <sub>R</sub>	10.0 200.0								µA
Maximum reverse recovery time    (NOTE 1)	t <sub>rr</sub>	50					70			ns
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	100.0					65.0			pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub>	10.0								°C/W
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>	-50 to +150								°C

**Note:** 1.Reverse recovery condition  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $t_{rr}=0.25\text{A}$

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3.Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

**MDD ELECTRONIC**

# RATINGS AND CHARACTERISTIC CURVES HER601 THRU HER608

AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES


FIG. 1- FORWARD CURRENT DERATING CURVE

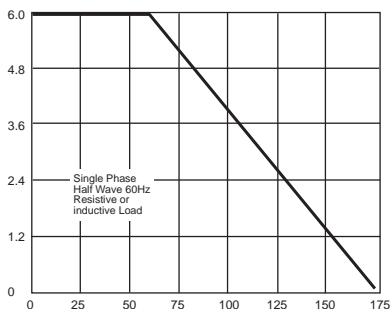

AMBIENT TEMPERATURE, °C


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

PEAK FORWARD SURGE CURRENT,  
AMPERES

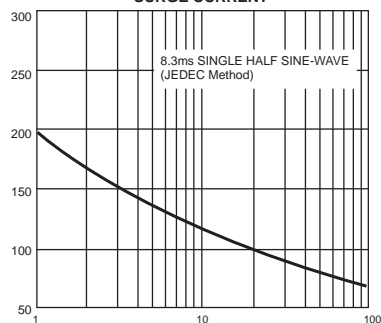

NUMBER OF CYCLES AT 60 Hz


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

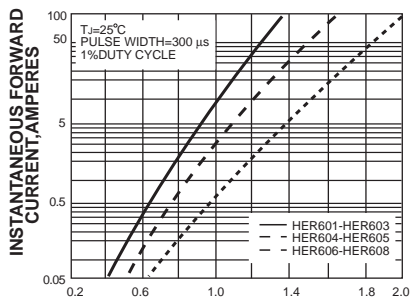

INSTANTANEOUS FORWARD VOLTAGE,  
VOLTS


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES

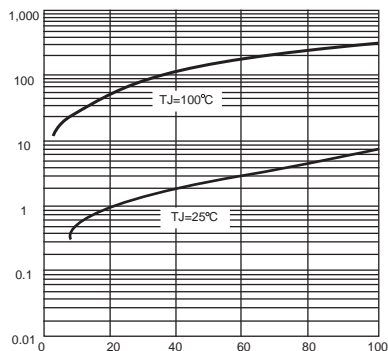

PERCENT OF PEAK REVERSE VOLTAGE, %


FIG. 5-TYPICAL JUNCTION CAPACITANCE

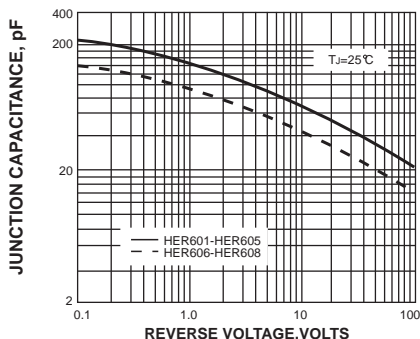

REVERSE VOLTAGE, VOLTS

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

TRANSIENT THERMAL IMPEDANCE,  
°C/W

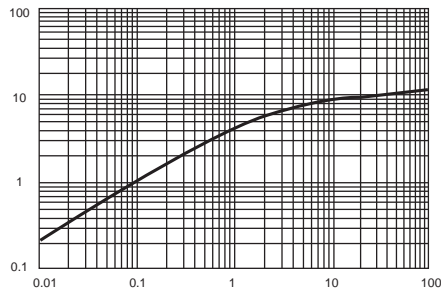

t, PULSE DURATION, sec.